



designer cooker hoods
with a difference

RECOMMENDED RETAIL PRICE LIST
EXCLUSIVE OF VAT



CONTENTS

INTRODUCTION	03
HOW TO CHOOSE A COOKER HOOD	04
FREQUENTLY ASKED QUESTIONS.....	05

COUNTERTOP EXTRACTORS

CHOPIN-EVO	06-07
BACH-EVO	08-09
CHOPIN-EVO with PANORAMIC INDUCTION HOB.....	10-11
BACH-EVO with DOMINO INDUCTION HOB	12-13
COMBIFLOW 800 1 PIECE HOB and EXTRACTOR.....	14-15

DOWNDRAFT EXTRACTORS

PARSIFAL	16-17
ZAIRA	18-19
ELEKTRA	20-21
MOZART.....	22-23

CEILING HOODS

SLIMLINE CLASSIC.....	24-25
SALIERI WHITE GLASS	26
SALIERI STAINLESS STEEL	27
ECLIPSE	28
RAFFAELLO STAINLESS STEEL	29
RAFFAELLO WHITE FRAME.....	30-31
OTELLO EXTRA WHITE GLASS and STAINLESS STEEL FRAME	32
OTELLO EXTRA WHITE GLASS and WHITE FRAME	33
OTELLO STAINLESS STEEL and STAINLESS STEEL FRAME.....	34
VERDI DUCTED.....	35
VERDI RECIRCULATING.....	36-37
AMADEUS	38-39

CUPBOARD HOODS

AIDA.....	40-41
GRUPPO INCASSO	42
RIGOLETTO GLASS	43
RIGOLETTO STAINLESS STEEL	44
HIDEAWAY.....	45

WALL HOODS

BOHEME BLACK GLASS	46-47
BOHEME STAINLESS STEEL	48
MURANO EVO	49
LEONARDO	50-51
HAMLET STAINLESS STEEL	52
HAMLET BLACK GLASS	53
VIVALDI	54


ISLAND HOODS

VERDI	55
MEDEA.....	56
NABUCCO.....	57
TURANDOT	58-59
ROSSINI	60-61
CORIAN® WING	62

MOTORS.....	63-64
-------------	-------

DUCTING

COMPAIR® DUCTING.....	65-66
DUCTING	67

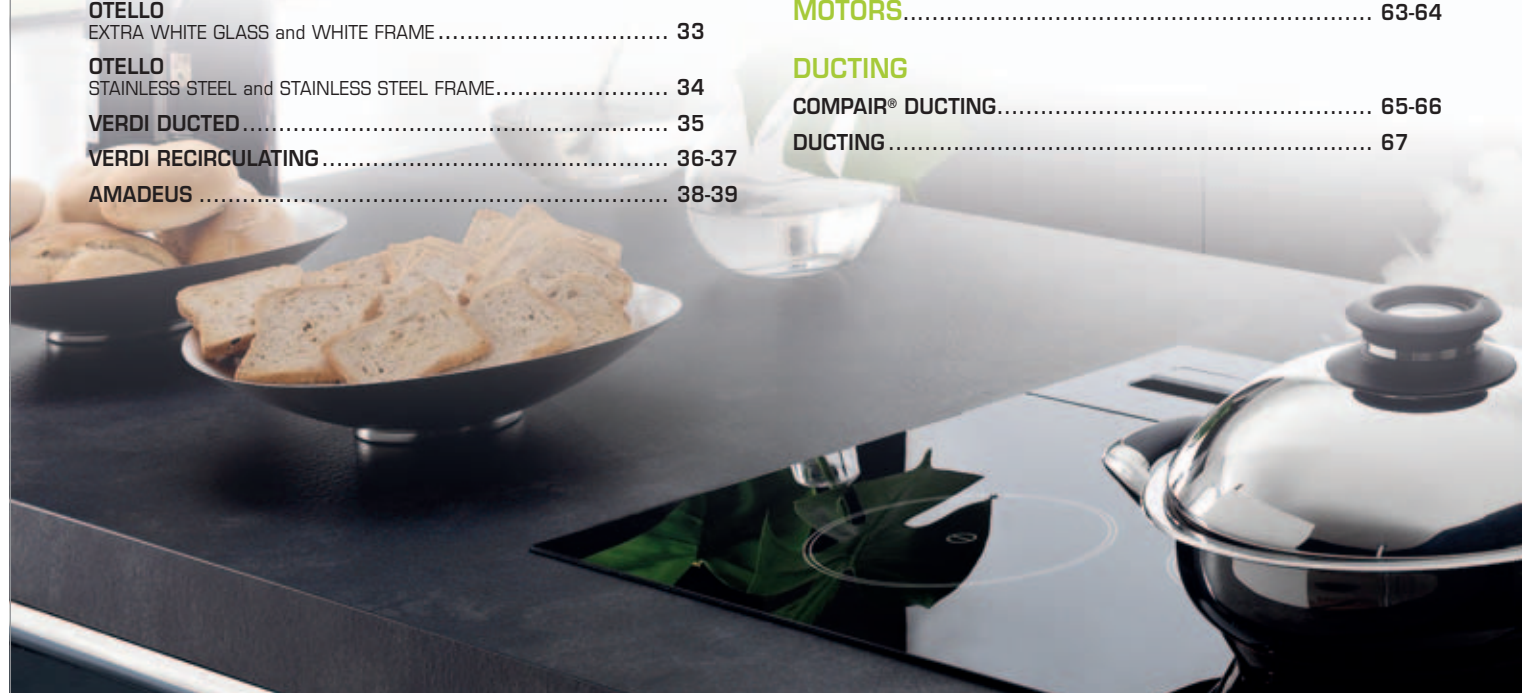

www.airuno.co.uk

INTRODUCTION

Air Uno was established in 2008 to distribute upmarket Italian designer cooker hoods.

The aim was to create a unique range of products which combined quality and efficiency with innovation.

Various creative options will satisfy the important issues for you in both design and performance.

The hoods fall into several groupings as follows:

Sophisticated **COUNTER EXTRACTORS** that extract fumes directly from the hob at the same level.

Sleek **DOWNDRAFTS** that disappear when not in use.

Unobtrusive **CEILING HOODS** that gives an attractive appearance of lighting while performing extraction extremely well.

CUPBOARD HOODS which means that the kitchen retains the clean lines that you wish to achieve.

A variety of well designed **WALL HOODS** in stainless steel, black or white glass which allows the choice of many styles.

Stunning **ISLAND HOODS** that compliments your kitchen by making your individual statement.

All our **MOTORS** give you the choice of power to suit your style of living and cooking.

COMPAIR® DUCTING which will maintain the power of all our extractors, reducing the noise level and saving energy.

We provide cooker hoods of top quality which are ex-stock for next day delivery.

Our after sales service is by our own engineer who is always available for technical advice.

designer cooker hoods with a difference



HOW TO CHOOSE A COOKER HOOD

Step 01. You need to determine the amount of air that the cooker hood needs to extract all the fumes, steam and odours


i.e. cubic metres per hour = m^3/h .

Establish the measurement of the kitchen length x width x height.

e.g. 5 metres long (L) x 4 metres wide (W) x 2.5 metres high (H) = 50 cubic metres.

One needs at least 10 changes of air per hour.

50 cubic metres x 10 = 500 cubic metres per hour.

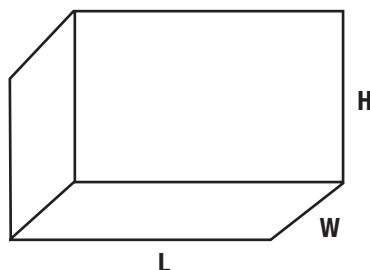

You have now established that your kitchen needs a cooker hood with an airflow of at least 500 cubic meters per hour = $500 \text{ m}^3/\text{h}$.

Step 02. You now need to choose the type of cooker hood suitable for your kitchen as well as keeping the airflow in mind.

Your kitchen dealer will help you in this matter and they will tell you the type of cooker hood you need.

i.e. **Downdraft - Ceiling Hood - Undermount Cupboard Hood - Wall Hood - Island Hood**

Your choice requires you now to decide on a cooker hood which aesthetically matches your kitchen as well as being the correct size for the hob and also the airflow to keep your kitchen free from fumes, steam and odours.

There is a wide variety of cooker hoods on the market and it is wise to choose a hood more powerful than necessary which will enable it to run at lower speed increasing the efficiency and reducing the noise.

It is also important to make sure the ducting is correctly designed and installed so that the full power of the motor in the cooker hood is maintained.

We recommend you choose rigid ducting either 150mm diameter or 2220mm x 90mm with as few bends as possible.

It is also important to make sure the ducting is correctly designed and installed so that the power of the motor in the cooker hood is maintained.



FREQUENTLY ASKED QUESTIONS**01. What size motor do I need?**

This depends on the size of your kitchen. See Step 01 on how to choose your cooker hood.

02. Can the hood recirculate the air?

Yes. All Air Uno hoods have the option to be re-circulating but you will need to use charcoal filters as these help to absorb the odours.

03. What size ducting should be used?

We recommend using no less than 150mm diameter or the equivalent rectangular - less than this will lead to loss of power of the extraction.

04. What height should the cooker hood be installed above the hob?

See individual product details.

05. Which model of hood can be used with an external motor?

Our full range of motors including our external model are compatible with every Air Uno extractor.

06. How far can the remote and external motors be positioned from the cooker hood?

All Air Uno motors i.e. AMR, AMF and AME come with a 10 metre long cable.

07. Can a gas hob be used with a downdraft?

Only the Elektra, Parsifal and Zaira downdraft models can be used with a gas hob.

08. How long is the warranty?

Our warranty is for 2 years and covers all parts and labour.

09. Where can you purchase an Air Uno cooker hood?

You can purchase from one of our recommended dealers which are listed on our website at www.airuno.co.uk.

10. What is the delivery time?

We deliver within 2-3 working days.

11. Motors - Can inline motors be installed outside?

No. The only motor that should be installed outside is our AME12 external motor.

12. Questions about the Chopin and Bach**How far away should the Chopin/Bach extractors be from the hob?**

No gap must be left.

What are carbon pellets for?

Carbon pellets are for use with a recirculation kit.

Can you use the recirculation kit with the silent kit?

Yes you can use both together, but the recirculation kit takes up a lot of space, so place the motor which is approximately 150mm high under the plinth.

Where do you put the ducting for the Chopin?

You connect the ducting to the underside of the Chopin, and then connect it to the top of the plinth motor using a converter kit, and from there to the outside.

13. Questions about the Elektra**Where do you attach the ducting to the attached motor?**

You attach the ducting on the top or the bottom of the motor.

What ducting do you use if you duct straight from the extractor?

We recommend using the Compair® ducting.

14. Questions about the Otello**Which motor is included in the price of the Otello?**

The H850 motor is included in the price.

What is the difference between the hood with motor and without motor?


The hood without the motor needs a remote or external motor.



CHOPIN-EVO COUNTERTOP EXTRACTOR




SPECIFICATIONS

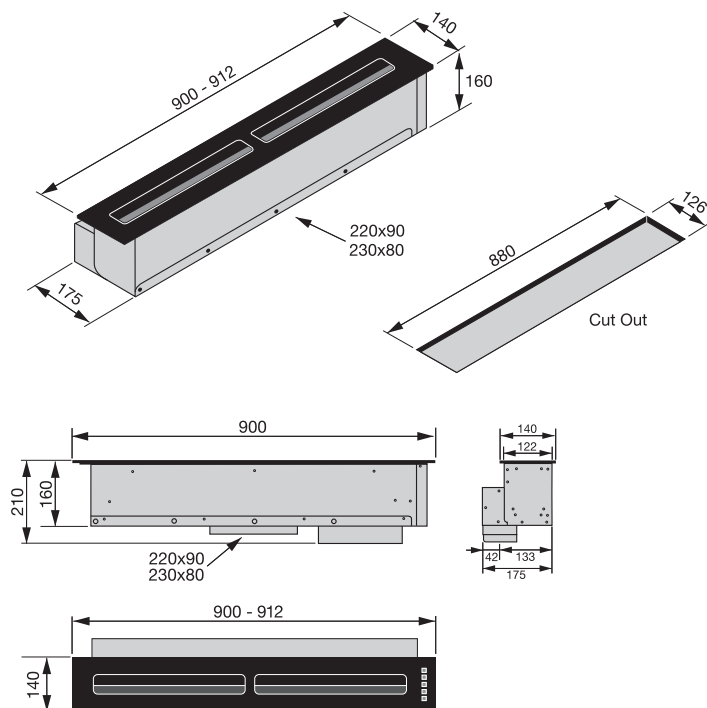

RECOMMENDED MOTOR

AMF13 Plinth Motor

See page 63 for price and specifications.



Controls: Touch Controls

Width: 900mm or 912mm

Colour/finish: Black Glass

Not suitable for use with gas hobs.
Do not leave a gap between hob and Chopin.

Motor	AMF13 Plinth Motor
Airflow m ³ /h	302 - 550
Pressure Pa	730
Noise db	59 - 73
Power W	190
Outlet Width mm	150
Fuse Rating	3A
Energy Class	B

The above motor is not included in price.

New Filter System
New Removable Liquid Collection Channel

Chopin-Evo Countertop Extractor

Black Glass

900mm wide **£948**

912mm wide **£948**

Plinth Kit

KFCPZ **£178**

Replacement Carbon Pellets

KFCP **£80** per bag

Optional Silent Kit

KSIL **£115**

All Prices Exclusive of VAT

CHOPIN-EVO COUNTERTOP EXTRACTOR

This counter extractor is for use with Panoramic hobs either induction or ceramic.

0.66 litre collection channel for any accidental spillage.



High efficiency extraction.

Easy to clean black glass.



4-speed touch control with automatic switch-off.

AMF13 remote motor positioned in the plinth to maximise space and reduce noise.

Top easy to remove for easy-access anti-grease filters.





F-VRO optional



F-VRO optional

F-EST optional



KSIL optional




KSIL
Silencer Kit

High efficiency extraction




Plinth charcoal filter kit

Optional carbon filter with 4kg of granular activated high quality carbon to provide up to 3 years without maintenance.

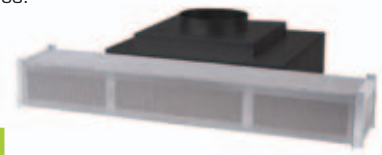


KFCPZ

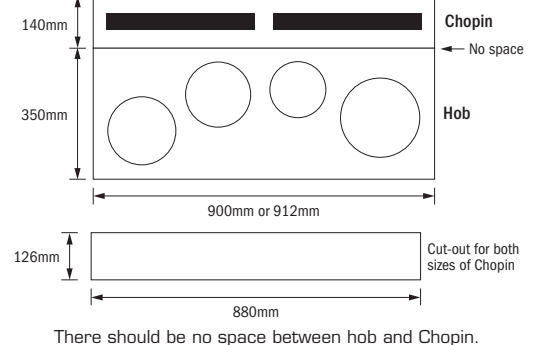

BACH-EVO COUNTERTOP EXTRACTOR



SPECIFICATIONS

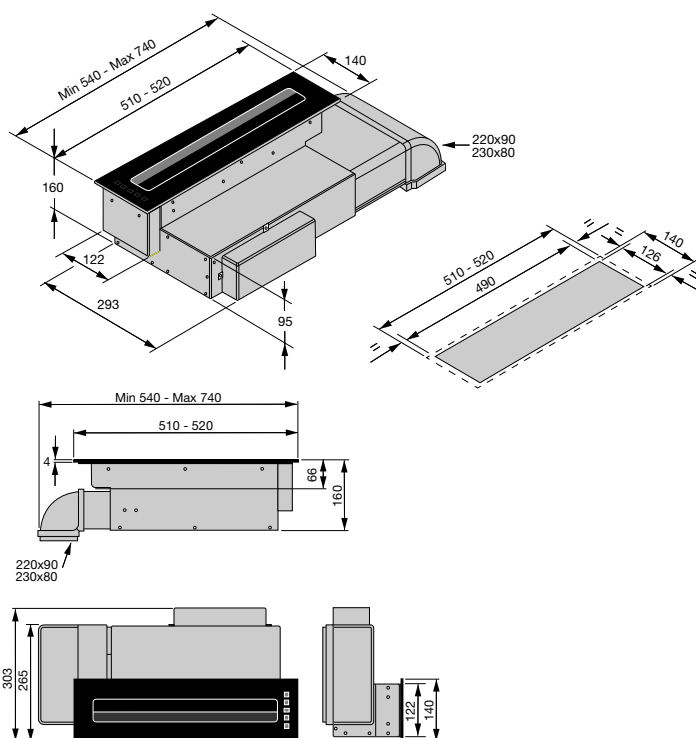

RECOMMENDED MOTOR

AMF13 Plinth Motor

See page 63 for price and specifications.



Controls: Touch Controls

Width: 510mm or 520mm

Colour/finish: Black Glass

Not suitable for use with gas hobs.
Do not leave a gap between the hobs and the Bach.

Motor	AMF10 Plinth Motor	AMF10 Plinth Motor
Airflow m ³ /h	435	277-483
Pressure Pa	590	730
Noise db	56-72	61-72
Power W	145	190
Outlet Width mm	150	150
Fuse Rating	3A	3A
Energy Class	B	B

The above motor is not included in price.

New Filter System
New Removable Liquid Collection Channel

Bach-Evo Countertop Extractor

Black Glass

510mm wide **£685**

520mm wide **£685**

Plinth Kit

KFCPZ **£178**

Replacement Carbon Pellets

KFCP **£80** per bag

Optional Silent Kit

KSIL **£115**

All Prices Exclusive of VAT


BACH-EVO COUNTERTOP EXTRACTOR

This countertop extractor is for use with domino hobs either induction or ceramic.

High efficiency extraction.

Easy to clean black glass.


0.5 litre collection channel for any accidental spillage.





AMF10 AMF13

Remote motor positioned in the plinth to maximise space and reduce noise.



Top easy to remove for easy-access anti-grease filters.



4-speed touch control with automatic switch-off.





F-VRO optional





F-VRO optional

F-EST optional




F-EST optional

KSIL optional




KSIL optional




KSIL
Silencer Kit

High efficiency extraction

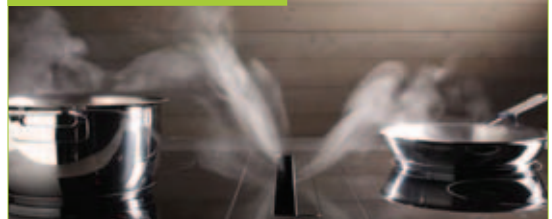

Plinth charcoal filter kit

Optional carbon filter with 4kg of granular activated high quality carbon to provide up to 3 years without maintenance.

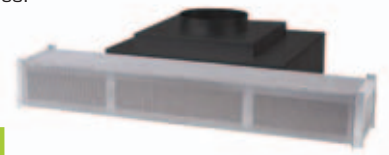


KFCPZ

CHOPIN-EVO COUNTERTOP EXTRACTOR WITH PANORAMIC INDUCTION HOB




SPECIFICATIONS

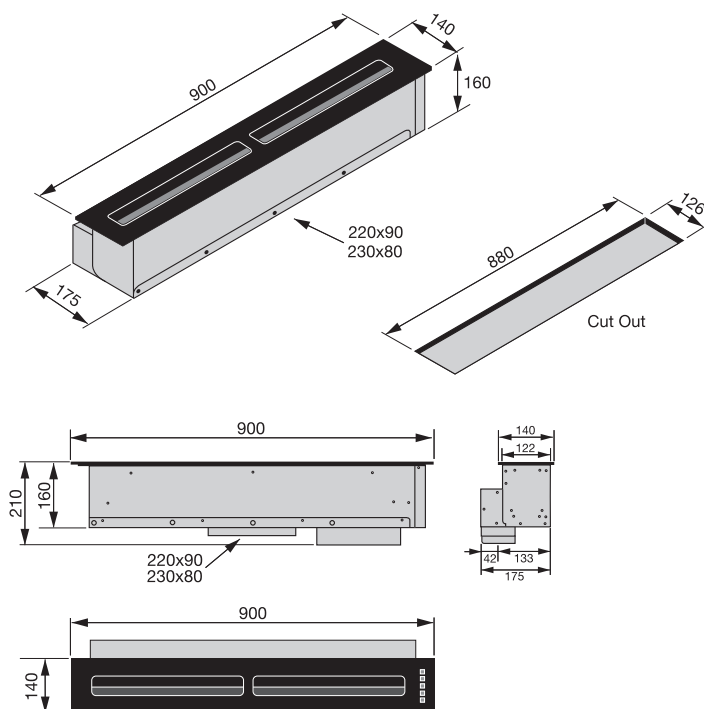

RECOMMENDED MOTOR

AMF13 Plinth Motor

See page 63 for price and specifications.



Controls: Touch Controls

Width: 900mm

Colour/finish: Black Glass

	Motor included in price
Motor	AMF13 Plinth Motor
Airflow m ³ /h	550
Pressure Pa	740
Noise db	59-73
Power W	190
Outlet Width mm	150
Fuse Rating	3A
Energy Class	B

New Filter System
New Removable Liquid Collection Channel

Chopin-Evo Countertop Extractor with Panoramic Induction Hob and Motor


Black Glass
900mm wide **£2063**

Plinth Kit
KFCPZ **£178**


Optional Silent Kit
KSIL **£115**

All Prices Exclusive of VAT

CHOPIN-EVO COUNTERTOP EXTRACTOR WITH PANORAMIC INDUCTION HOB

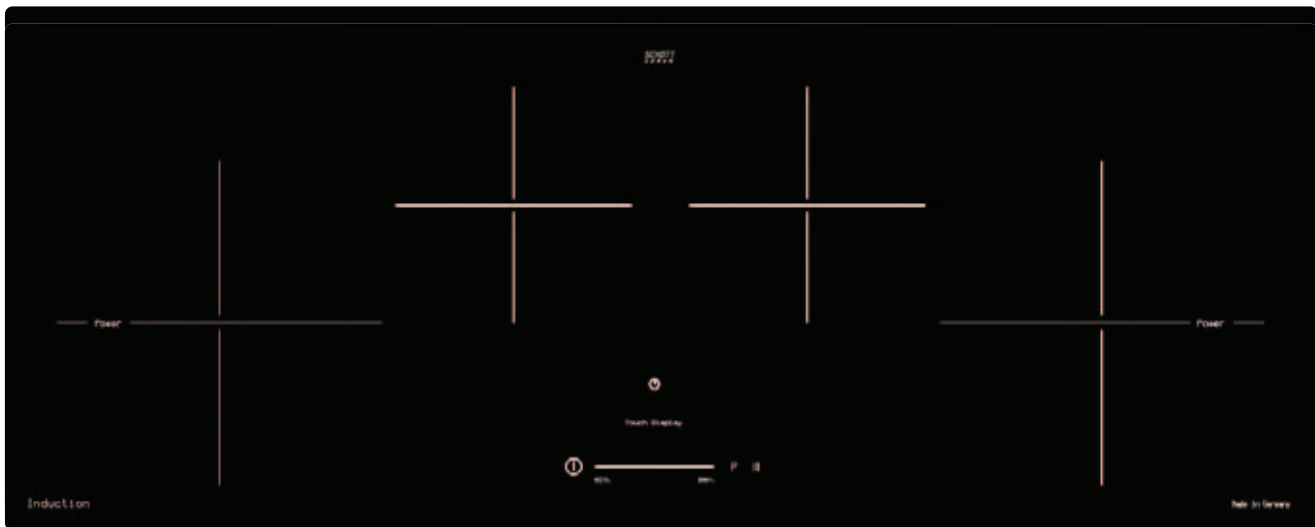

Surface Mounting

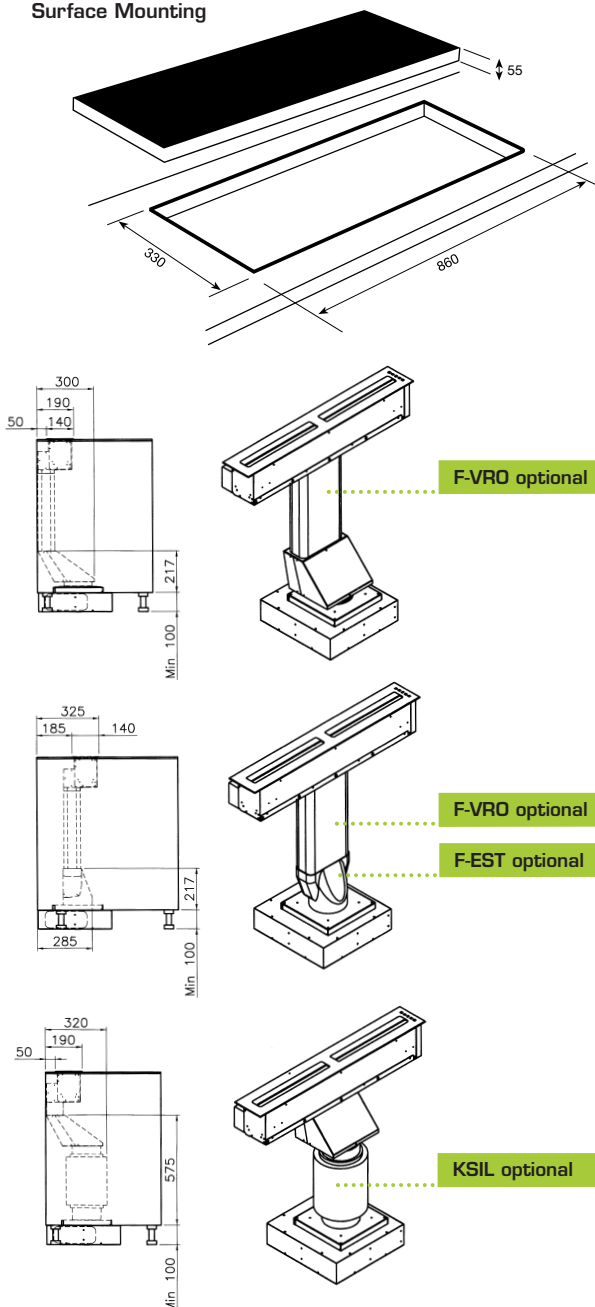

Panoramic Induction Hob IKT 90354

Versions and device dimensions (B x H x T):

Frameless 900 x 55 x 350mm

Opening dimensions (B x T):

860 x 330mm

Equipment/functions:

- Touch display
- Automatic cooking
- Power level for each cooking zone
- Timer
- Pause function
- Recall function
- Child lock (key combination)

Control:

- Safety shut-off
- Sensor control/TC Lite Slider
- Residual heat indicator

Cooking zones:

- 1 induction cooking zone Ø 200mm, 2.3/3.0 kW
- 1 induction cooking zone Ø 160mm, 1.4 kW
- 1 induction cooking zone Ø 160mm, 1.4 kW
- 1 induction cooking zone Ø 200mm, 2.3/3.0 kW

Connected loads:

- Voltage AC 230V/2NAC 400V
- Output 7.4kW

Silencer Kit



KSIL

Plinth charcoal filter kit

Optional carbon filter with 4kg of granular activated high quality carbon to provide up to 3 years without maintenance.




KFCPZ

BACH-EVO COUNTERTOP EXTRACTOR WITH DOMINO INDUCTION HOBS



SPECIFICATIONS

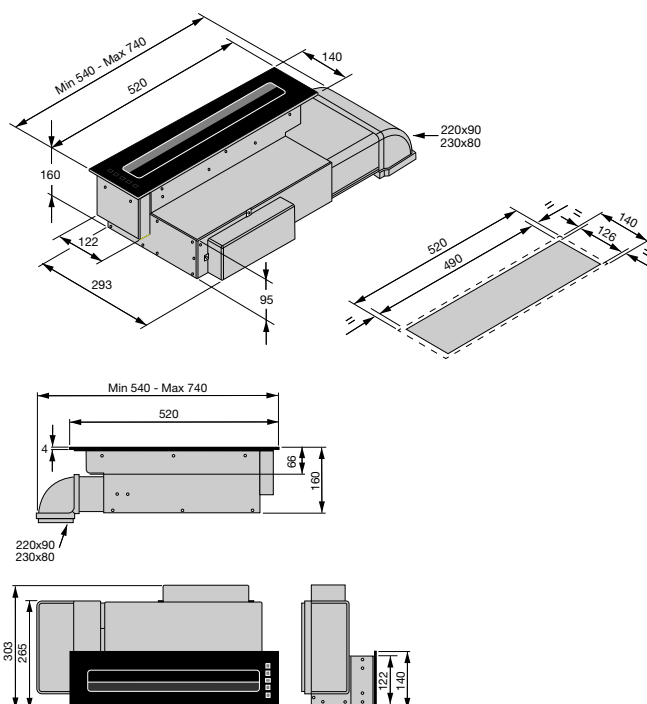

RECOMMENDED MOTOR

AMF13 Plinth Motor

See page 63 for price and specifications.



Controls: Touch Controls

Width: 520mm

Colour/finish: Black Glass

	Motor included in price
Motor	AMF13 Plinth Motor
Airflow m ³ /h	483
Pressure Pa	740
Noise db	61-72
Power W	190
Outlet Width mm	150
Fuse Rating	3A
Energy Class	B

New Filter System
New Removable Liquid Collection Channel

Bach-Evo Countertop Extractor with Domino Induction Hobs and Motor

2 no. Domino Induction Hobs

520mm wide **£1808**

1 no. Domino Induction Hob and 1 no. Flexi Hob

520mm wide **£2079**

2 no. Flexi Hobs

520mm wide **£2350**

Plinth Kit

KFCPZ **£178**

Optional Silent Kit

KSIL **£115**

All Prices Exclusive of VAT

BACH-EVO COUNTERTOP EXTRACTOR WITH DOMINO INDUCTION HOBS



Domino Induction Hob IKT 302

Versions and device dimensions (B x H x T):
Frameless 300 x 55 x 520mm



Opening dimensions (B x T):
265 x 490mm

Equipment/functions:
Power level for rear cooking zone
Timer
Child lock (key combination)

Control:
Safety shut-off
Sensor control/TC easy
Residual heat indicator

Cooking zones:
1 induction cooking zone Ø 160mm, 1.4 kW
1 induction cooking zone Ø 200mm, 1.4/2.0 kW

Connected loads:
Voltage AC 230V
Output 3.4kW

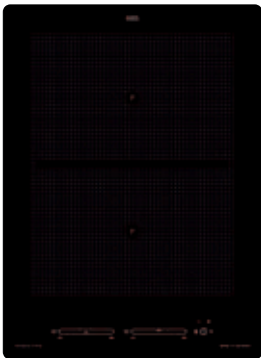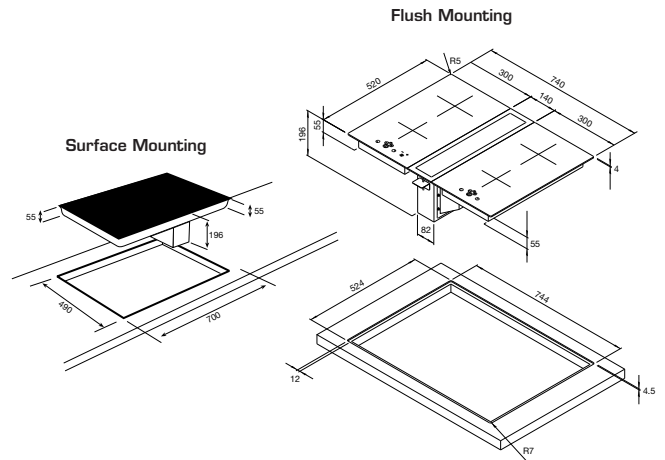

Domino Flexi Induction Hob IKT 382

Versions and device dimensions (B x H x T):
Frameless 380 x 52 x 520mm, R = 5mm




Opening dimensions (B x T):
360 x 490mm

Equipment/functions:
Automatic Cooking
Power level for each cooking zone
Bridge function (front and rear)
Timer
Melt setting 42°C
Hold setting 70°C
Simmer setting 94°C
Pause function
Recall function
Lock
Child lock (key combination)



Control:
Safety shut-off
Sensor control/TC-Flex slider
Residual heat indicator

Cooking zones:
2 induction cooking zones 190 x 220mm,
2.1/3.7 kW

Connected loads:
Voltage AC 230V
Output 3.7kW


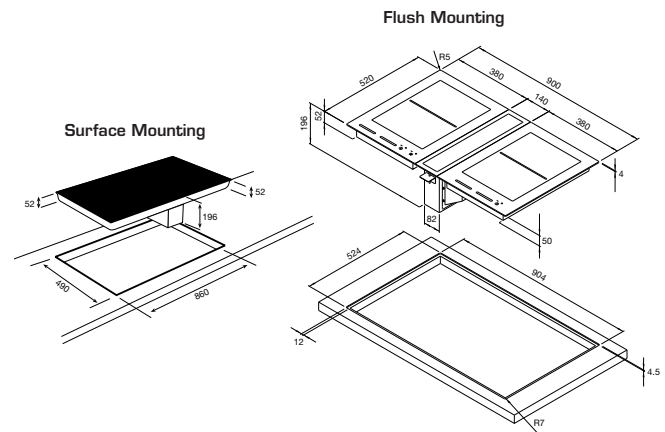


F-VRO optional





F-VRO optional

F-EST optional



F-EST optional

KSIL optional



KSIL optional

Silencer Kit


KSIL





Plinth charcoal filter kit

Optional carbon filter with 4kg of granular activated high quality carbon to provide up to 3 years without maintenance.

KFCPZ



COMBIFLOW 800 ONE PIECE HOB & EXTRACTOR

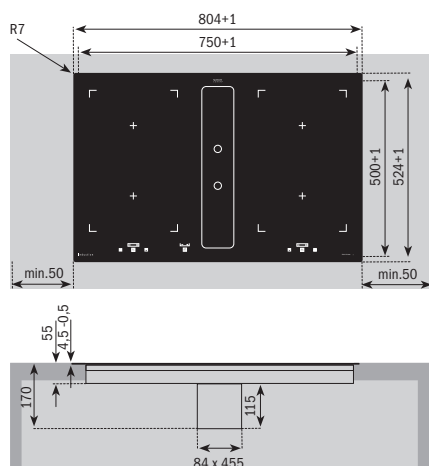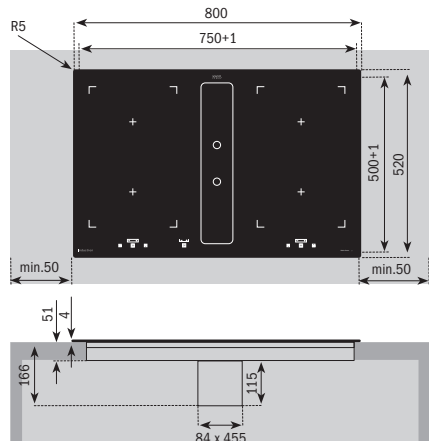
SPECIFICATIONS
Flush Mounting

Countertop Mounting

Controls: Touch Controls
Width: 800mm
Colour/finish: Black Glass

	Motor included in price
Motor	H800
Airflow m ³ /h	243-600
Pressure Pa	600
Noise db	48-68
Power W	115
Outlet width mm	150
Fuse Rating	3A
Energy Class	A

Combiflow 800 One Piece Hob & Extractor

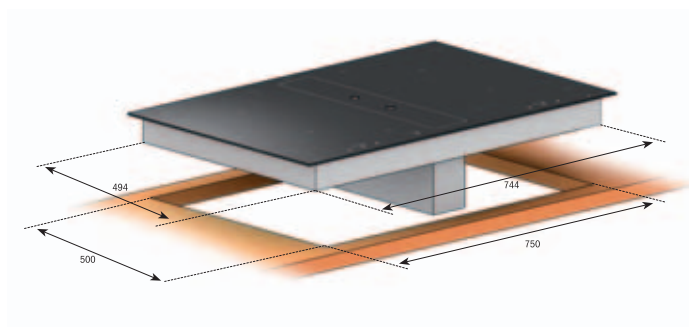800mm x 520mm **£1990**
Price includes ducting from hob to motor and the motor.

All Prices Exclusive of VAT







COMBIFLOW 800 ONE PIECE HOB & EXTRACTOR

Optional to install flush mounted or countertop mounted

Highly efficient extraction.

Induction hob and cooker hood combination


The Combiflow 800 comes with a full central cover which fits flush to the hob together with 2 alternative grilles as shown.

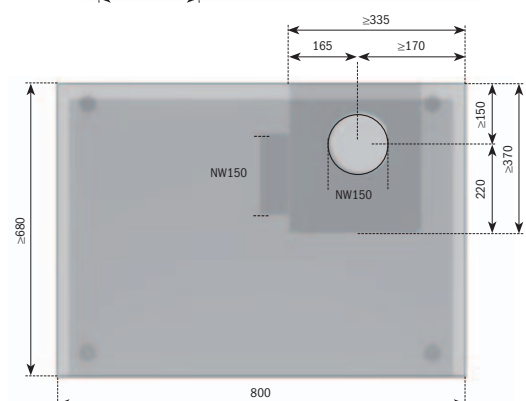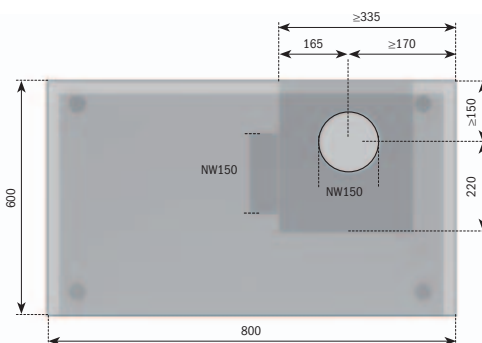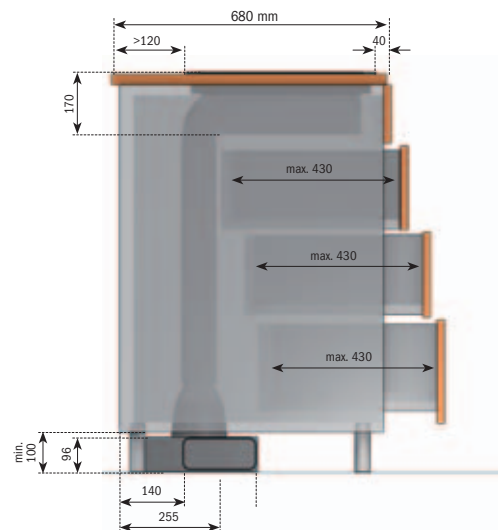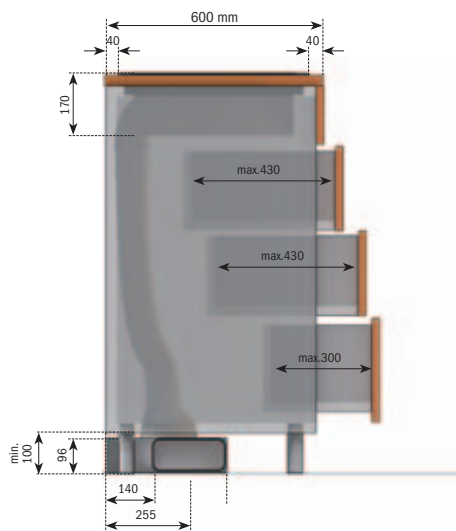

PARSIFAL DOWNDRAFT EXTRACTOR



SPECIFICATIONS

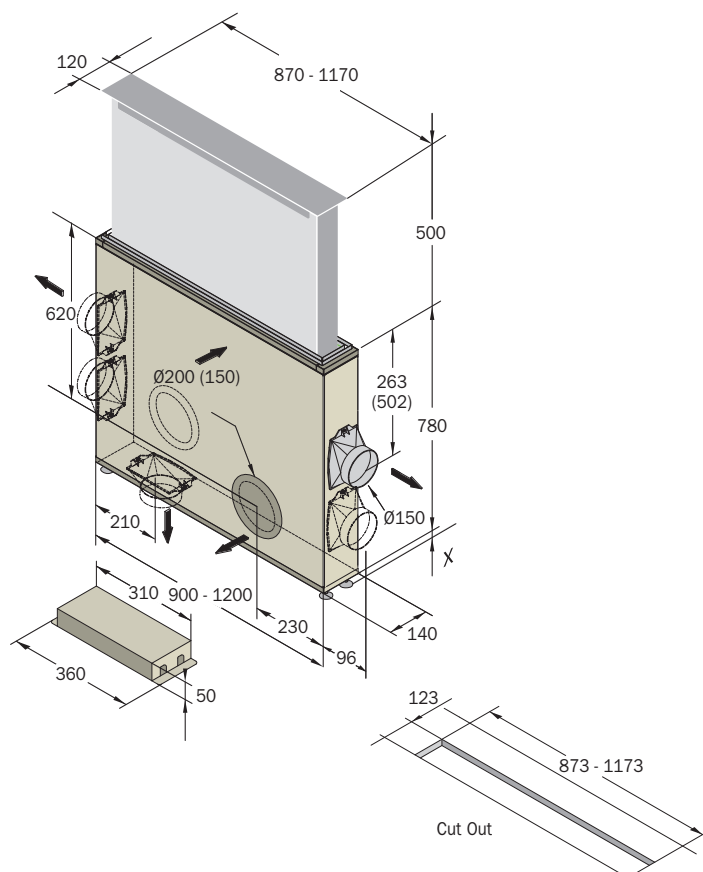

Controls: Remote Control

Width: 900mm or 1200mm

Colour/finish: Stainless Steel/Black Glass/White Glass

Motor	AMR09	AMR10	AMR20	AME12	AMF10	AMF13
Airflow m ³ /h	680	835	1330	855	790	855
Pressure Pa	560	580	590	760	600	760
Noise db	51-72	40-73	48-75	65-85	56-78	64-80
Power W	235	345	690	190	145	190
Outlet Width mm	150	150	200	150	150	150
Fuse Rating	3A	3A	3A	3A	3A	3A
Energy Class	B	B	C	B	B	B

Remote and external motors available.

The above motor is not included in price.

The same worktop material can be used for the top of the upstand.

Parsifal Downdraft Extractor

Stainless Steel

900mm wide **£2657**

1200mm wide **£3029** (to special order)

Black Glass

900mm wide **£3275**

1200mm wide **£3709** (to special order)

White Glass

900mm wide **£3558** (to special order)

Optional Charcoal Filter £15

All Prices Exclusive of VAT

PARSIFAL DOWNDRAFT EXTRACTOR

Possibility to customize top with the same finish as the worktop.



Anti-crush safety system.



High efficiency extraction.

The screen extends 500mm by means of a highly efficient mechanism.

Easily accessible grease filters for easy cleaning.

Available in either stainless steel and black or white glass.

Activated carbon filters for use with recirculation version.

Stainless steel frame to protect edge of laminate worktop.



Stainless steel or matching top.




Channel to collect spilt liquid.



External, remote and flat motors



AMD motor with 4 possible positions



Plinth charcoal filter kit

Optional carbon filter with 4kg of granular activated high quality carbon to provide up to 3 years without maintenance.



KFCPZ


Remote control



ZAIRA DOWNDRAFT EXTRACTOR



SPECIFICATIONS

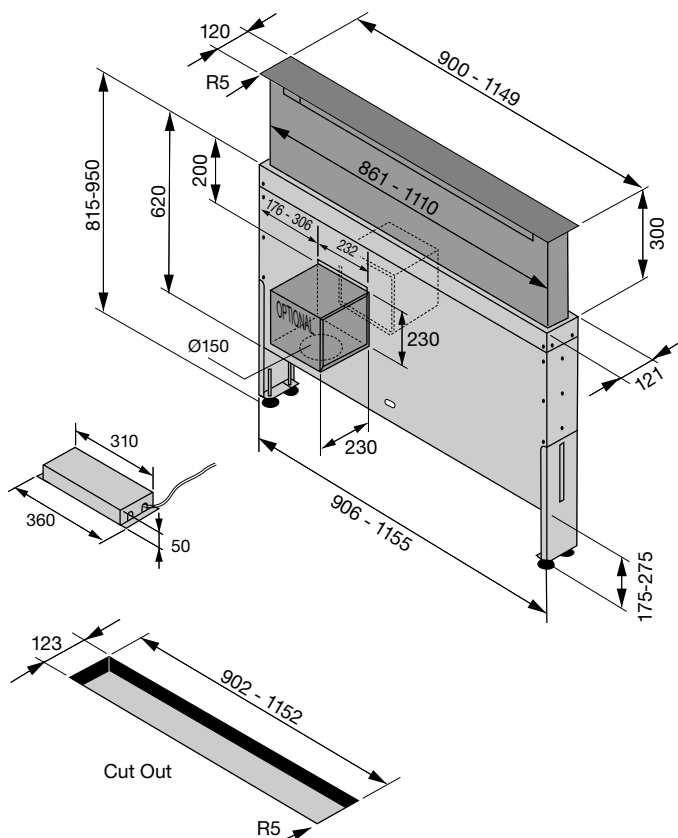

Controls: Remote Control

Width: 900mm or 1200mm

Colour/finish: Stainless Steel/Black Glass

Lighting: LED - 7/9.4W - 4200k

	Motor included in price				
Motor	S800	AME12	AMF10	AMF13	AMR20
Airflow m³/h	233-748	855	790	855	1330
Pressure Pa	582	760	600	760	590
Noise db	43-69	65-85	56-78	64-80	48-75
Power W	285	190	145	190	690
Outlet Width mm	150	150	150	150	200
Fuse Rating	3A	3A	3A	3A	3A
Energy Class	A	B	B	B	C

Remote and external motors available.

Additional charges will apply on alternative choices.

The recommended gap between hob and Zaira is 50mm.

Zaira Downdraft Extractor

Stainless Steel

900mm wide **£2298**

1200mm wide **£2472**

Black Glass

900mm wide **£2625**

1200mm wide **£2812**

All Prices Exclusive of VAT

We recommend the use of linear hobs, gas hobs, induction and glass ceramic.

ZAIRA DOWNDRAFT EXTRACTOR

Possibility to customize top with the same finish as the worktop.



Anti-crush safety system.



High efficiency extraction.

The screen extends 300mm by means of a highly efficient mechanism.

Easily accessible grease filters for easy cleaning.

Activated carbon filters for use with recirculation version.


Available in either stainless steel and black glass.

Channel to collect spilt liquid.

Stainless steel or matching top.



Possibility to use flat motor under the hood and plinth carbon filter.




Possibility to use AMD on board motor with 4 different air outlet positions.

External, remote and flat motors



AMD motor with 4 possible positions



Plinth charcoal filter kit

Optional carbon filter with 4kg of granular activated high quality carbon to provide up to 3 years without maintenance.



KFCPZ


Remote control



ELEKTRA DOWNDRAFT EXTRACTOR



SPECIFICATIONS

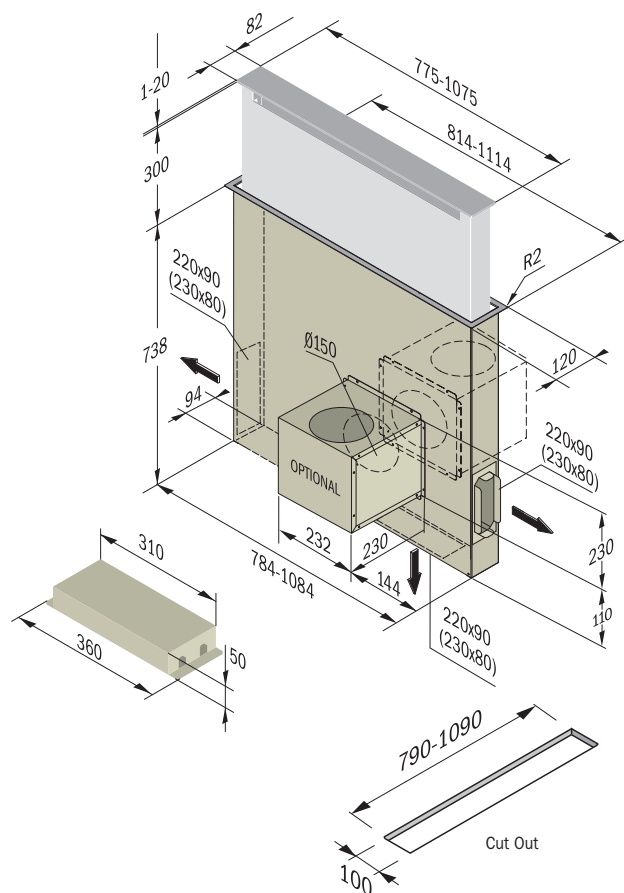

Controls: Remote Control

Width: 900mm or 1200mm

Colour/finish: Stainless Steel/Black Glass

Lighting: LED - 6.3/9.2w - 4200k

	Motor included in price					
Motor	S800	AMR10	AMR20	AME12	AMF10	AMF13
Airflow m ³ /h	230-730	835	1330	855	790	855
Pressure Pa	607	580	590	760	600	760
Noise db	42-66	40-73	48-75	65-85	56-78	64-80
Power W	280	345	690	190	145	190
Outlet Width mm	150	150	200	150	150	150
Fuse Rating	3A	3A	3A	3A	3A	3A
Energy Class	A	B	C	B	B	B

Remote and external motors available.

Additional charges will apply on alternative choices.

The same worktop material can be used for the top of the upstand.

The recommended gap between hob and Elektra is 50mm.

Elektra Downdraft Extractor

Stainless Steel

814mm wide **£1978** (Hob size 900mm or smaller)

1114mm wide **£2179** (Hob size 1200mm or smaller)

Black Glass

814mm wide **£2045** (Hob size 900mm or smaller)

1114mm wide **£2284** (Hob size 1200mm or smaller)

Optional Charcoal Filter

PCR5 **£12** each

All Prices Exclusive of VAT

ELEKTRA DOWNDRAFT EXTRACTOR

Anti-crush safety system.



The screen extends 300mm by means of a highly efficient mechanism.

Possibility to customise with the same finish as the top.

Standard LED lighting.

High efficiency extraction.

Easily accessible grease filters for easy cleaning.

Activated carbon filters for recirculation version.


Stainless steel trim.



External, remote and flat motors




AMD motor with 4 possible positions



Plinth charcoal filter kit

Optional carbon filter with 4kg of granular activated high quality carbon to provide up to 3 years without maintenance.

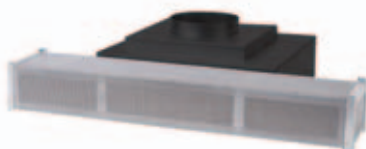

KFCPZ


Remote control



MOZART DOWNDRAFT EXTRACTOR



SPECIFICATIONS

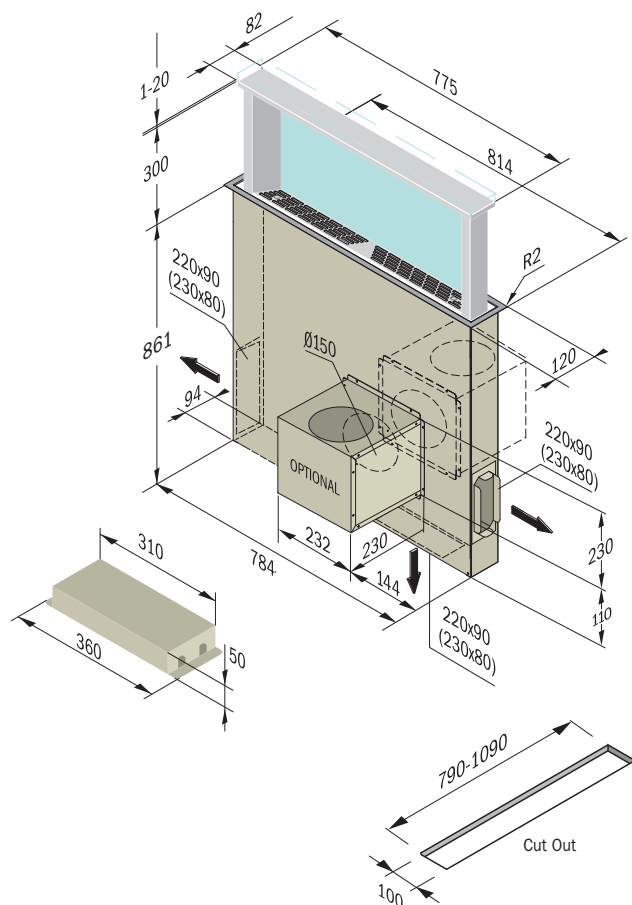

Controls: Remote Control

Width: 900mm

Colour/finish: Stainless Steel

Lighting: LED - 6.3 - 4200k

Not suitable for use with gas hobs.

Motor
included
in price

Motor	S800	AMR10	AMR20	AME12	AMF10	AMF13
Airflow m ³ /h	230-730	835	1330	855	790	855
Pressure Pa	607	580	590	760	600	760
Noise db	42-66	40-73	48-75	65-85	56-78	64-80
Power W	280	345	690	190	145	190
Outlet Width mm	150	150	200	150	150	150
Fuse Rating	3A	3A	3A	3A	3A	3A
Energy Class	A	B	C	B	B	B

Remote and external motors available.

Additional charges will apply on alternative choices.
The recommended gap between hob and Mozart is 50mm.

Mozart Downdraft Extractor

Stainless Steel

814mm wide **£2040** (Hob size 900mm or smaller)

Optional Charcoal Filter

PCR3 **£12** each

All Prices Exclusive of VAT

MOZART DOWNDRAFT EXTRACTOR

Anti-crush safety system.



The screen extends 300mm by means of a highly efficient mechanism.

The modern design is created by means of clear glass panel which gives visual impact and more integration with the living space.

LED lighting.

Double extraction gives better efficiency to the base and under the top.


Easily accessible grease filters for easy cleaning.

Perforated steel mesh.

External, remote and flat motors



AMD motor with 4 possible positions



Plinth charcoal filter kit

Optional carbon filter with 4kg of granular activated high quality carbon to provide up to 3 years without maintenance.



KFCPZ


Remote control



SLIMLINE CLASSIC CEILING HOOD



SPECIFICATIONS

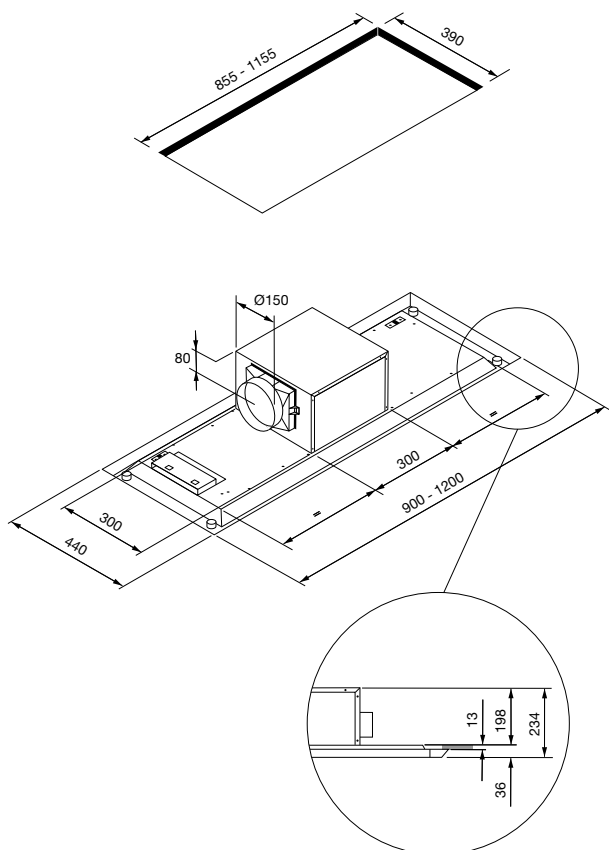

Controls: Remote Control

Width: 900mm or 1200mm

Colour/finish: Extra White Glass and Stainless Steel Frame or Extra White Glass and White Frame

Lighting: LED - 4.8w - 4000k

Distance from Hob: Max 1.6m

Motor included in price

Motor	H850
Airflow m ³ /h	620 - 766
Pressure Pa	414
Noise db	40 - 60
Power W	155
Fuse Rating	3A
Energy Class	B

Slimline Classic Ceiling Hood

Extra White Glass and White Frame

900mm wide **£1204**

1200mm wide **£1331**

Extra White Glass and Stainless Steel Frame

900mm wide **£1204**


1200mm wide **£1331**

All Prices Exclusive of VAT




SLIMLINE CLASSIC CEILING HOOD






Fits **"across"** the joists

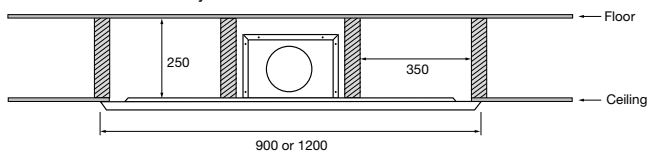

Fits **"in between"** the joists

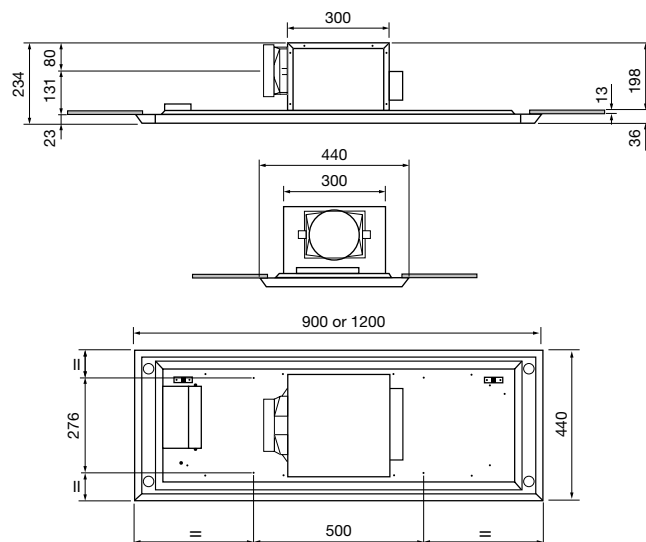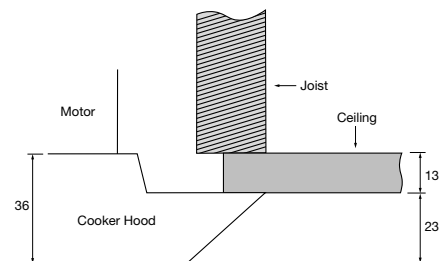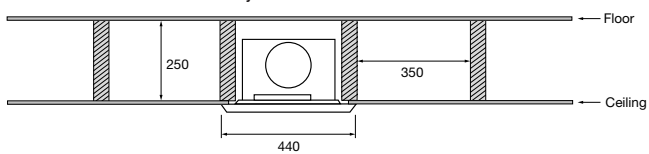

SALIERI CEILING HOOD - WHITE GLASS

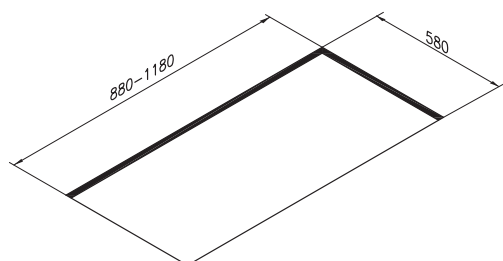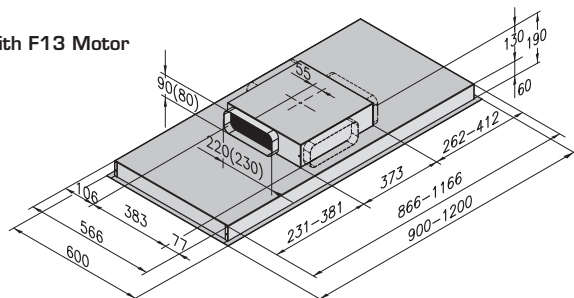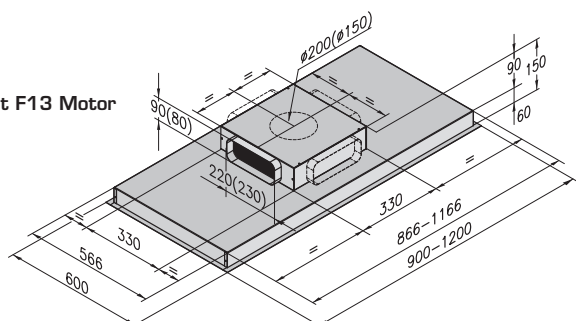SPECIFICATIONS

With F13 Motor

Without F13 Motor

Controls: Remote Control
Width: 900mm - 1200mm
Colour/finish: White Glass
Lighting: LED - 17w - 3000k
Distance from Hob: 1.6m Max
**Motor
included
in price**

Motor	F13	AMR10	AMR20	AME12	AMF10	AMF13
Airflow m ³ /h	418-826	835	1330	855	790	855
Pressure Pa	772	580	590	760	600	760
Noise db	50-70	40-73	48-75	65-85	56-78	64-80
Power W	190	345	690	190	145	190
Outlet Width mm	150	150	200	150	150	150
Fuse Rating	3A	3A	3A	3A	3A	3A
Energy Class	B	B	C	B	B	B

Salieri Ceiling Hood - White Glass
Without Motor

900mm wide **£820**

1200mm wide **£898**
With Motor

900mm wide **£1260**


1200mm wide **£1328**

All Prices Exclusive of VAT


SALIERI CEILING HOOD - STAINLESS STEEL




SPECIFICATIONS

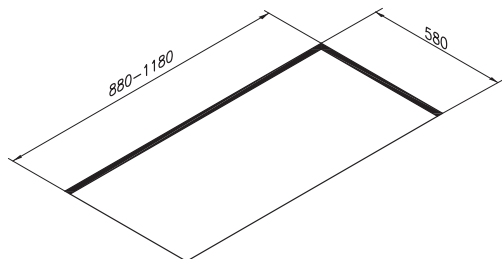

With F13 Motor

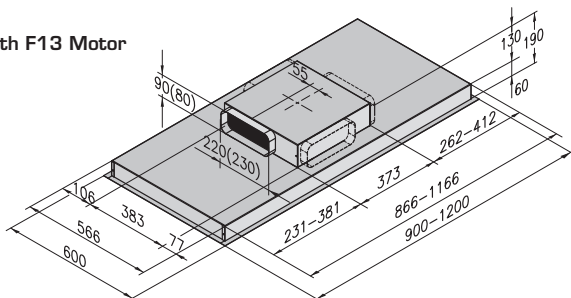

Without F13 Motor

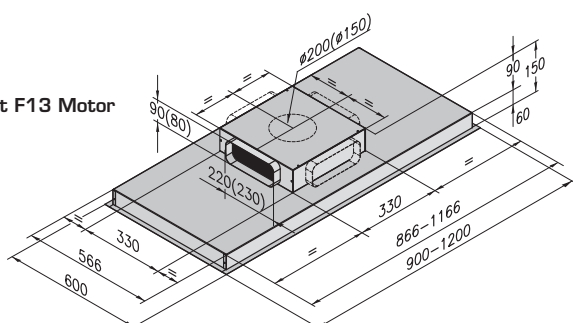

Controls: Remote Control

Width: 900mm - 1200mm

Colour/finish: Stainless Steel

Lighting: LED - 17w - 3000k

Distance from Hob: 1.6m Max

Motor
included
in price

Motor	F13	AMR10	AMR20	AME12	AMF10	AMF13
Airflow m ³ /h	418-826	835	1330	855	790	855
Pressure Pa	772	580	590	760	600	760
Noise db	50-70	40-73	48-75	65-85	56-78	64-80
Power W	190	345	690	190	145	190
Outlet Width mm	150	150	200	150	150	150
Fuse Rating	3A	3A	3A	3A	3A	3A
Energy Class	B	B	C	B	B	B

Salieri Ceiling Hood - Stainless Steel

Without Motor

900mm wide **£908**

1200mm wide **£961**


With Motor

900mm wide **£1258**

1200mm wide **£1319**

All Prices Exclusive of VAT

ECLIPSE CEILING HOOD

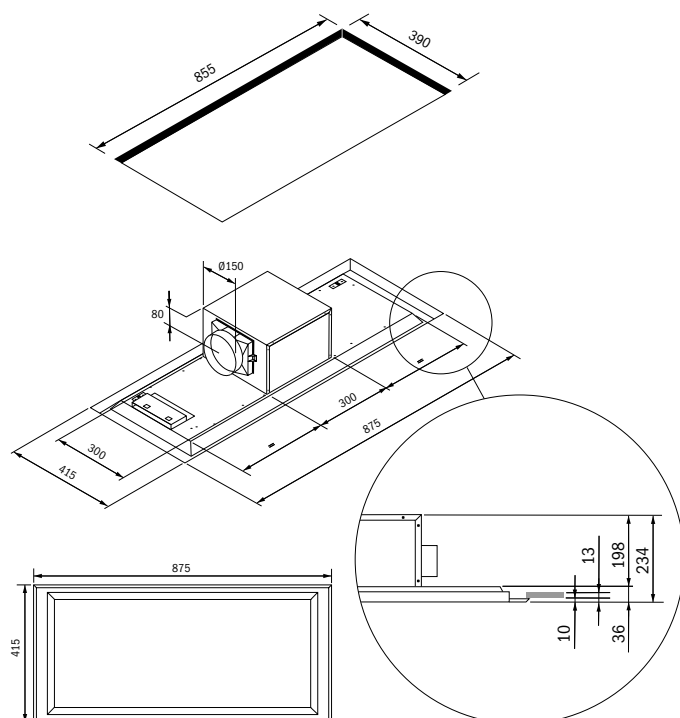SPECIFICATIONS


Controls: Remote Control

Width: 900mm

Colour/finish: Extra White Glass and White Frame

No Lighting - Extraction Only

Distance from Hob: 1.6m Max

	Motor included in price
Motor	H850
Airflow m ³ /h	620 - 766
Pressure Pa	414
Noise db	40- 60
Power W	155
Fuse Rating	3A
Energy Class	B

Eclipse Ceiling Hood

Extra White Glass and White Frame


 900mm wide **£1012**

All Prices Exclusive of VAT


RAFFAELLO CEILING HOOD - STAINLESS STEEL with WHITE LED PANEL




SPECIFICATIONS

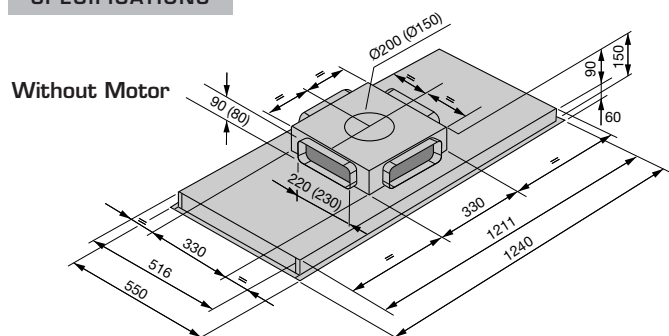

With Motor

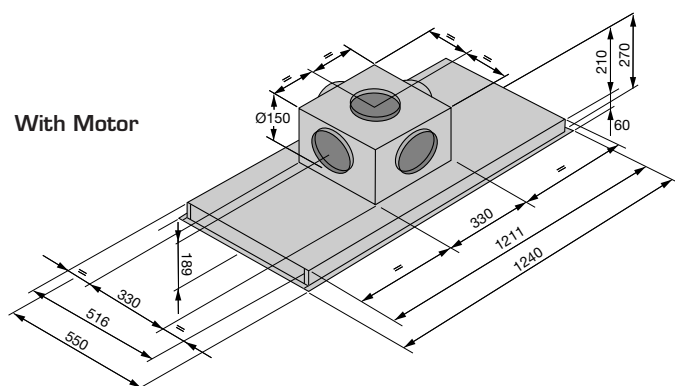

Bottom

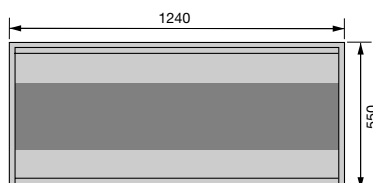

Cut Out for Hood
1220 x 530

Controls: Remote Control

Width: 1200mm

Colour/finish: Stainless Steel with White LED panel

Lighting: Dimmable LED Panel
36w - 3000k

Distance from Hob: Max 1.6m

Motor
included
in price

Motor	H850	AME12	AMF10	AMF13	AMR20
Airflow m³/h	355-810	855	790	855	1330
Pressure Pa	566	760	600	760	590
Noise db	50-69	65-85	56-78	64-80	48-75
Power W	280	190	145	190	690
Outlet Width mm	150	150	150	150	200
Fuse Rating	3A	3A	3A	3A	3A
Energy Class	B	B	B	B	C

Additional charges will apply depending on motor choice.

Raffaello Ceiling Hood - Stainless Steel with White LED Panel

Without Motor



1200mm wide **£1094**

With Motor

1200mm wide **£1256**

All Prices Exclusive of VAT

RAFFAELLO CEILING HOOD - WHITE FRAME with WHITE LED PANEL

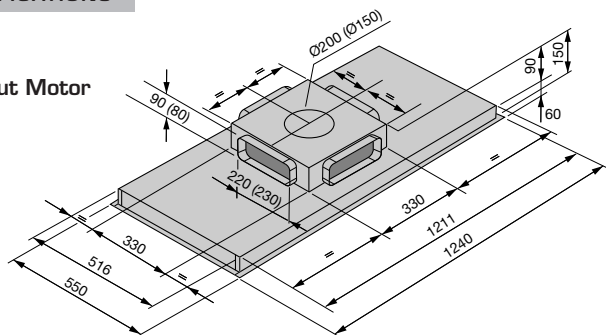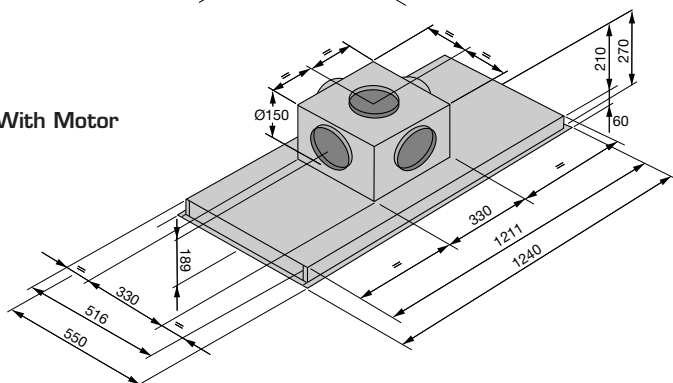SPECIFICATIONS
Without Motor

With Motor

Bottom


Cut Out for Hood
1220 x 530

Controls: Remote Control

Width: 1200mm

Colour/finish: White Frame with White LED Panel

Lighting: Dimmable LED Panel
36w - 3000k

Distance from Hob: Max 1.6m

Motor included in price

Motor	H850	AME12	AMF10	AMF13	AMR20
Airflow m³/h	355-810	855	790	855	1330
Pressure Pa	566	760	600	760	590
Noise db	50-69	65-85	56-78	64-80	48-75
Power W	280	190	145	190	690
Outlet Width mm	150	150	150	150	200
Fuse Rating	3A	3A	3A	3A	3A
Energy Class	B	B	B	B	C

Additional charges will apply depending on motor choice.

Raffaello Ceiling Hood - White Frame with White LED Panel

Without Motor

1200mm wide **£1094**

With Motor

1200mm wide **£1256**

All Prices Exclusive of VAT

RAFFAELLO CEILING HOOD

Ceiling hood available with or without motor. The version without motor can be combined to all our remote motors.

Available in Stainless Steel or White.

Dimmerable lighting with 3000k power LED panel.

Control on hood border for emergency shutdown with speeds and filter cleaning signal.

Easy to install thanks to the opening for fixing the air outlet junction.

Perimeter suction.

External, remote and flat motors





Remote control



OTELLO CEILING HOOD - EXTRA WHITE GLASS and STAINLESS STEEL FRAME

SPECIFICATIONS
Without Motor

- : OTELLO 90
- : OTELLO 120

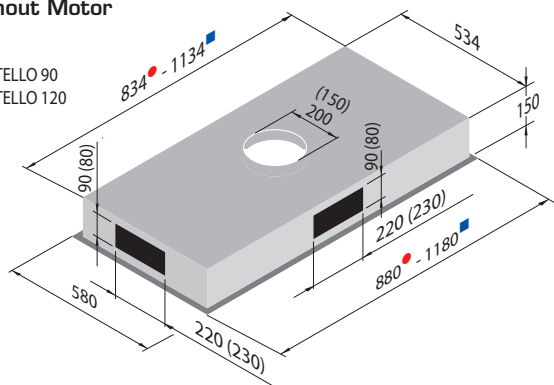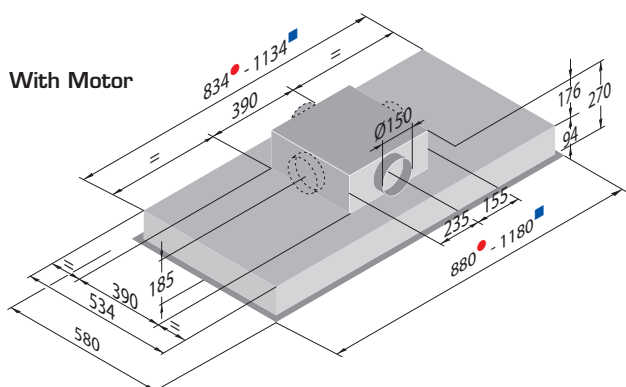
With Motor


Cut out for hood - 850mm or 1150mm x 550mm

Controls: Remote Control

Width: 900mm or 1200mm

Colour/finish: Stainless Steel/Glass

Lighting: LED - 4000k

Options available:
Warm White 2700k and
Cool White 5500k 3.6w/4.8w
See page 64 for prices

Distance from Hob: Max 1.6m

Motor
included
in price

Motor	H850	AMR10	AMR20	AME12	AMF10	AMF13
Airflow m³/h	335-779	835	1330	855	790	855
Pressure Pa	597	580	590	760	600	760
Noise db	47-67	40-73	48-75	65-85	56-78	64-80
Power W	280	345	690	190	145	190
Outlet Width mm	150	150	200	150	150	150
Fuse Rating	3A	3A	3A	3A	3A	3A
Energy Class	A	B	C	B	B	B

Additional charges will apply on alternative choices.

Otello Ceiling Hood - Extra White Glass and Stainless Steel Frame
Without Motor

900mm wide **£985**
1200mm wide **£1075**

With Motor

900mm wide **£1130**
1200mm wide **£1241**

All Prices Exclusive of VAT


OTELLO CEILING HOOD - EXTRA WHITE GLASS and WHITE FRAME




SPECIFICATIONS

Without Motor

- : OTELLO 90
- : OTELLO 120

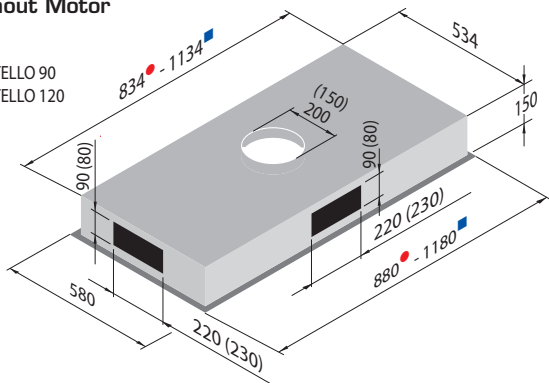

With Motor

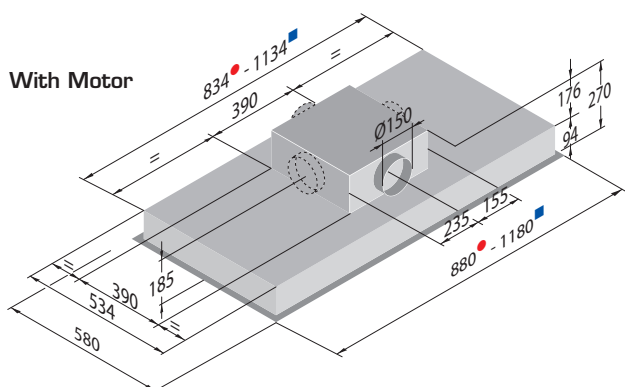

Cut out for hood - 850mm or 1150mm x 550mm

Controls: Remote Control

Width: 900mm or 1200mm

Colour/finish: Extra White Glass

Lighting: LED - 4000k

Options available:
Warm White 2700k and
Cool White 5500k 3.6w/4.8w
See page 64 for prices

Distance from Hob: Max 1.6m

Motor
included
in price

Motor	H850	AMR10	AMR20	AME12	AMF10	AMF13
Airflow m ³ /h	335-779	835	1330	855	790	855
Pressure Pa	597	580	590	760	600	760
Noise db	47-67	40-73	48-75	65-85	56-78	64-80
Power W	280	345	690	190	145	190
Outlet Width mm	150	150	200	150	150	150
Fuse Rating	3A	3A	3A	3A	3A	3A
Energy Class	A	B	C	B	B	B

Additional charges will apply on alternative choices.

Otello Ceiling Hood - Extra White Glass and Frame

Without Motor

900mm wide **£993**
1200mm wide **£1091**

With Motor



900mm wide **£1148**
1200mm wide **£1247**

All Prices Exclusive of VAT

OTELLO CEILING HOOD - STAINLESS STEEL and STAINLESS STEEL FRAME

SPECIFICATIONS
Without Motor

- : OTELLO 90
- : OTELLO 120

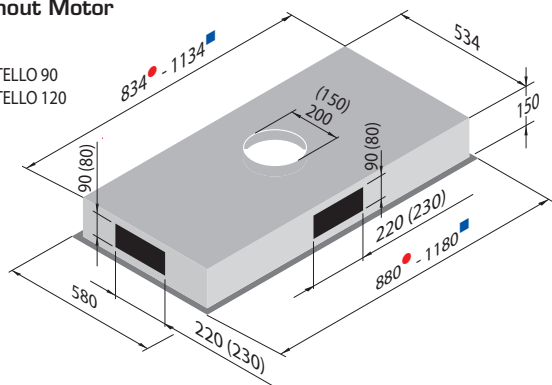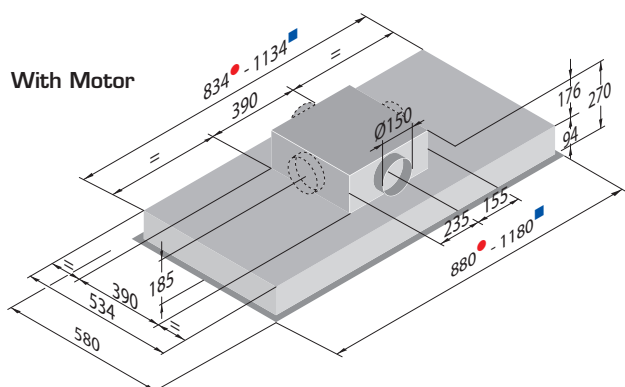
With Motor


Cut out for hood - 850mm or 1150mm x 550mm

Controls: Remote Control

Width: 900mm or 1200mm

Colour/finish: Stainless Steel

Lighting: LED - 4000k

Options available:
Warm White 2700k and
Cool White 5500k 3.6w/4.8w
See page 64 for prices

Distance from Hob: Max 1.6m

	Motor included in price					
Motor	H850	AMR10	AMR20	AME12	AMF10	AMF13
Airflow m ³ /h	335-779	835	1330	855	790	855
Pressure Pa	597	580	590	760	600	760
Noise db	47-67	40-73	48-75	65-85	56-78	64-80
Power W	280	345	690	190	145	190
Outlet Width mm	150	150	200	150	150	150
Fuse Rating	3A	3A	3A	3A	3A	3A
Energy Class	A	B	C	B	B	B

Additional charges will apply on alternative choices.

Otello Ceiling Hood - Stainless Steel and Stainless Steel Frame
Without Motor

900mm wide **£1012**




1200mm wide **£1138**

With Motor

900mm wide **£1159**

1200mm wide **£1285**

All Prices Exclusive of VAT

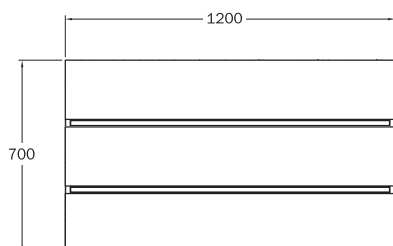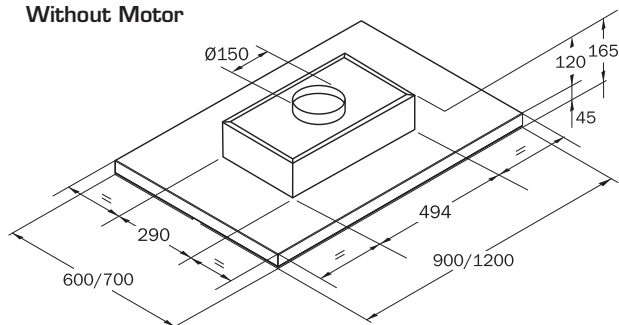VERDI DUCTED CEILING HOOD**SPECIFICATIONS****Without Motor****Controls: Remote Control****Width: 900mm or 1200mm****Colour/finish: White Glass****Lighting: LED - 17w/24w - 4000k****Distance from Hob: Max 1.6m**

Motor	AMR09	AMR10	AMR20	AMF10	AMF13	AME12
Airflow m ³ /h	680	835	1330	790	855	855
Pressure Pa	560	580	590	600	760	760
Noise db	51-72	40-73	48-75	56-78	64-80	65-85
Power W	235	345	690	145	190	190
Fuse Rating	3A	3A	3A	3A	3A	3A
Energy Class	B	B	C	B	B	B

Remote and external motors available.




The above motors are not included in the price.

See pages 63 and 64 for prices.

Verdi Ducted Ceiling Hood**White Glass**900mm wide **£1019**1200mm wide **£1215** (to special order)

All Prices Exclusive of VAT

VERDI RECIRCULATING CEILING HOOD

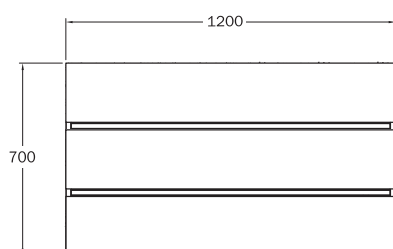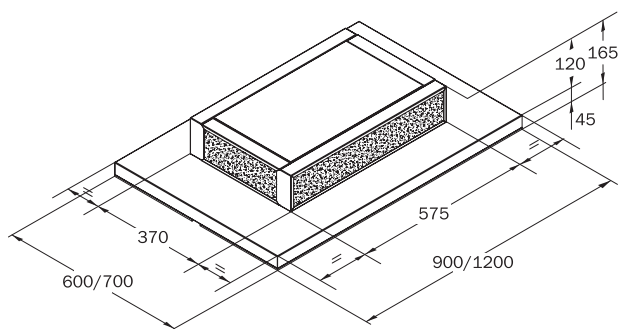SPECIFICATIONS

Controls: Remote Control

Width: 900mm or 1200mm

Colour/finish: White Glass

Lighting: LED - 17w/24w - 4200k

Distance from Hob: Max 1.6m

	Motor included in price
Motor	E800
Airflow m ³ /h	350 - 650
Pressure Pa	380
Noise db	37 - 58
Power W	90
Fuse Rating	3A

Verdi Recirculating Ceiling Hood
White Glass

900mm wide **£1313**

1200mm wide **£1476**
Long Life Charcoal Filters **£80**
Optional Deflector Kit **£98**



All Prices Exclusive of VAT

VERDI RECIRCULATING CEILING HOOD

It does not require ducting for the extraction of fumes, because the hood is designed for recirculation.

Low consumption motor (only 90w at full power).

4kg cartridges are fitted to the sides of the motor. These cartridges are granulated activated high quality carbon of high efficiency. These cartridges will last for 3 years without maintenance.

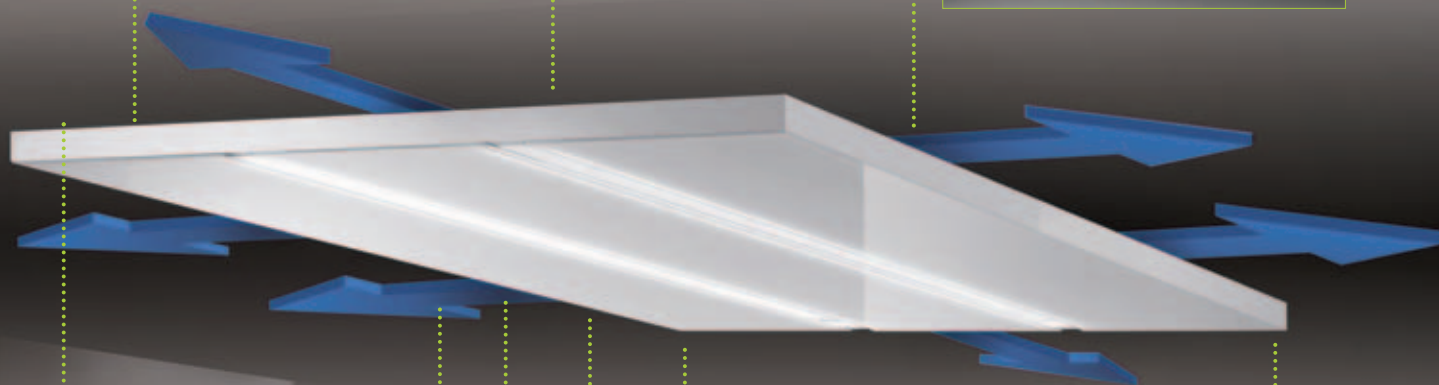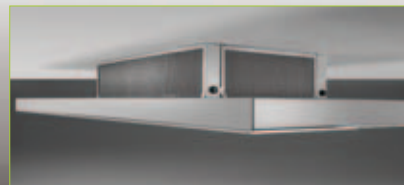

White tempered glass panels that open for easy access to the metal filters.

Extraction from all sides of the hood.

Standard LED lighting strip (4200k).

165mm between top of hood ceiling.

Control board cover for emergency shutdown, with indication of speed and signal cleaning filters.

Optional deflector kit to cover the carbon filters




Remote control



AMADEUS RECIRCULATING CEILING HOOD



SPECIFICATIONS

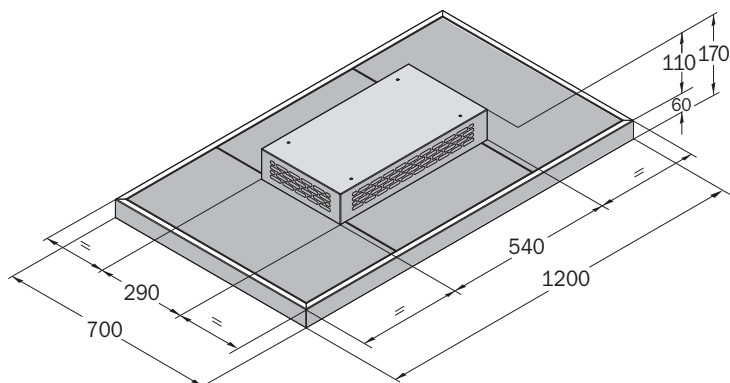

Recirculating Model

Controls: Remote Control

Width: 1200mm

Colour/finish: Stainless Steel/Glass

Lighting: LED - 4000k
Options available:
Warm White 2700k and
Cool White 5500k - 4.8w
See page 64 for prices

Distance from Hob: Max 1.6m

	Motor included in price
Motor	AMA
Airflow m ³ /h	350 - 650
Pressure Pa	380
Noise db	38 - 58
Power W	90
Outlet Width mm	150
Fuse Rating	3A

Amadeus Ceiling Hood

Stainless Steel/Glass

1200mm wide **£1740**

Replacement Carbon Filters **£51**


All Prices Exclusive of VAT

AMADEUS RECIRCULATING CEILING HOOD

No need for ducting for the extraction of the fumes, because the hood is designed for recirculation.

Low consumption motor (only 90w at full power).

Long life carbon filters keep the aluminium frame clean. Do not need any maintenance for 3 years.

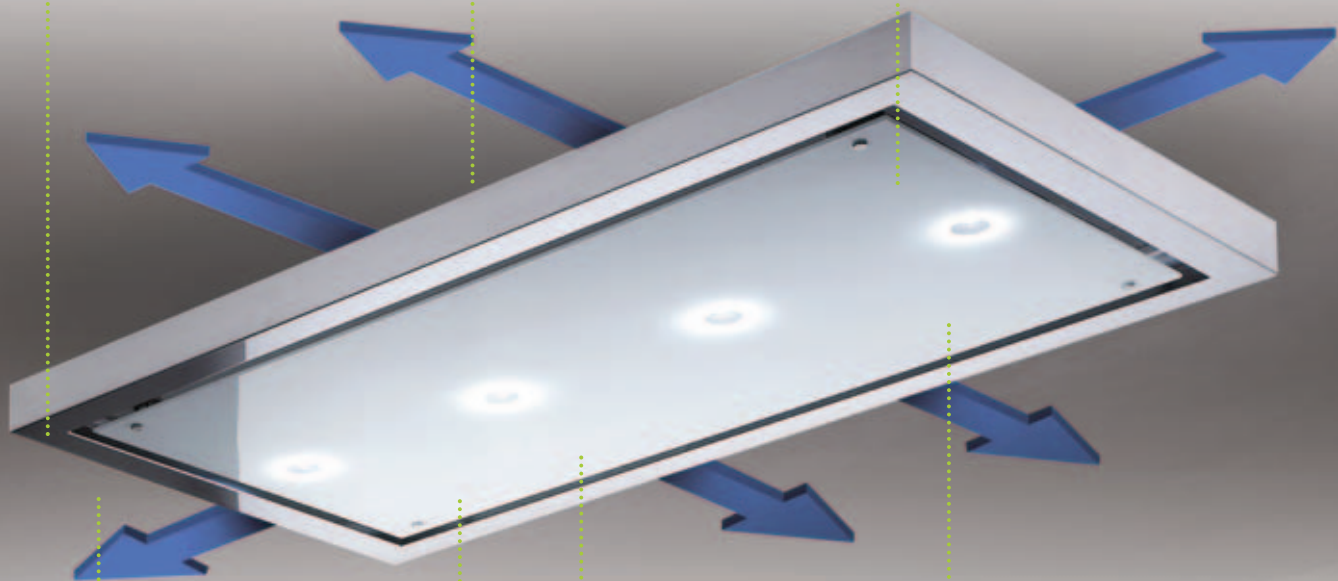

White tempered glass panel with perimeter extraction.

Standard LED lighting strip (4000k).



360° perimeter extraction by low speed air outlet.

Control board cover for emergency shutdown, with indication of speed and signal cleaning filters.

Remote control



AIDA BUILT-IN CUPBOARD HOOD

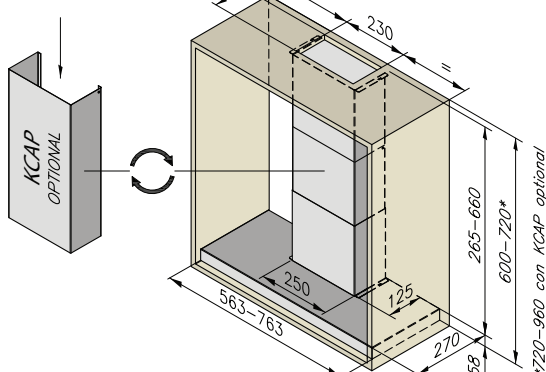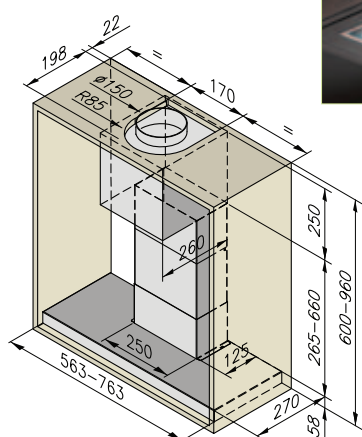SPECIFICATIONS

Controls: 4 Speed Control
Width: 600mm or 900mm
Colour/finish: Stainless Steel/Glass
Lighting: LED - 4000k

Options available:
Warm White 2700k and
Cool White 5500k - 2.4w
See page 64 for prices

Distance from Hob: Should be 450mm

	Motor included in price					
Motor	H850	AMR10	AMR20	AME12	AMF10	AMF13
Airflow m ³ /h	322-573	835	1330	855	790	855
Pressure Pa	582	580	590	760	600	760
Noise db	52-67	40-73	48-75	65-85	56-78	64-80
Power W	280	345	690	190	145	190
Outlet Width mm	150	150	200	150	150	150
Fuse Rating	3A	3A	3A	3A	3A	3A
Energy Class	B	C	D	C	C	C

Remote and external motors available.

Additional charges will apply depending on motor choice.

Aida Built-In Cupboard Hood
Stainless Steel/Glass

534mm wide **£899** (Cabinet size 600mm)

734mm wide **£940** (Cabinet size 900mm)

Optional Remote Control £104
Optional Charcoal Filters

600mm - PCR5 **£12** each

900mm - PCR2 **£14** each


All Prices Exclusive of VAT

AIDA BUILT-IN CUPBOARD HOOD


Cupboard hood with external and remote motors.



External, remote and flat motors

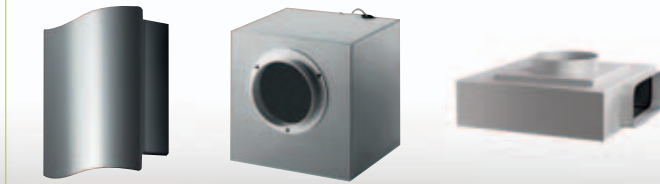

Powerful motor with flue at top or back outlet.



Stainless steel cover for the chimney.

Minimal dimensions to save as much space as possible.

Grease filters are easily accessible.


Activated carbon filters.

High efficiency perimeter extraction.


LED lighting.

4 speed soft touch control with automatic switch off.

Remote control

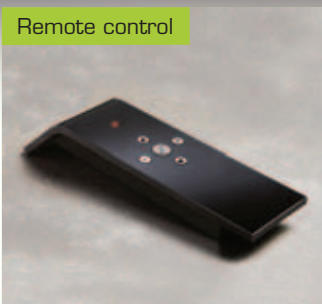

GRUPPO INCASSO BUILT-IN CUPBOARD HOOD

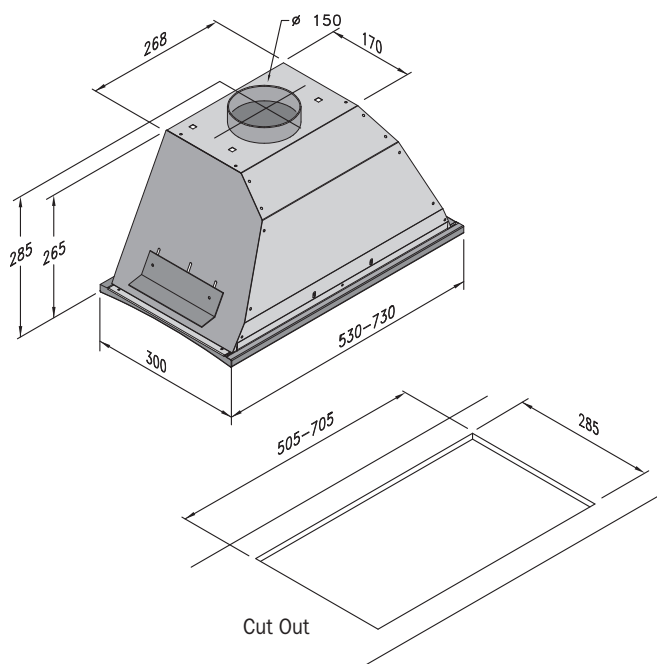SPECIFICATIONS

Controls: 4 Speed Soft Touch Control
Width: 600mm or 900mm
Colour/finish: Stainless Steel
Lighting: LED - 4000k

Options available:
Warm White 2700k and
Cool White 5500k - 2.4w
See page 64 for prices

Distance from Hob: Should be 650mm

	Motor included in price
Motor	H850
Airflow m ³ /h	280 - 800
Pressure Pa	566
Noise db	48 - 70
Power W	235
Outlet Width mm	150
Fuse Rating	3A
Energy Class	B

Gruppo Incasso Built-In Cupboard Hood
Stainless Steel


530mm wide **£489** (Cabinet size 600mm)

730mm wide **£548** (Cabinet size 900mm)

Optional Charcoal Filter

FCCN **£16** each

All Prices Exclusive of VAT

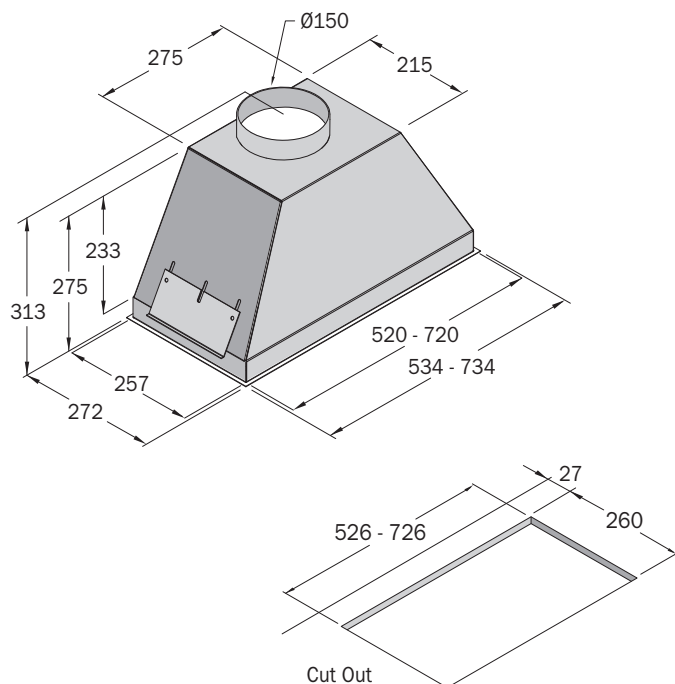
RIGOLETTO BUILT-IN CUPBOARD HOOD - GLASS**SPECIFICATIONS****Controls: 4 Speed Soft Touch Control****Width: 600mm or 900mm****Colour/finish: Glass****Lighting: LED - 4000k**Options available:
Warm White 2700k and
Cool White 5500k - 2.4w
See page 64 for prices**Distance from Hob: Should be 650mm****Motor included in price**

Motor	H800	
Model	600mm	900mm
Airflow m³/h	247 - 592	247 - 592
Pressure Pa	566	566
Noise db	47-67	47-67
Power W	235	235
Outlet Width mm	150	150
Fuse Rating	3A	3A
Energy Class	B	B

Rigoletto Built-In Cupboard Hood**Glass**534mm wide **£546** (Cabinet size 600mm)734mm wide **£569** (Cabinet size 900mm)**Optional Remote Control £104****Optional Charcoal Filters**600mm - PCR5 **£12** each900mm - PCR2 **£14** each

All Prices Exclusive of VAT

RIGOLETTO BUILT-IN CUPBOARD HOOD - STAINLESS STEEL

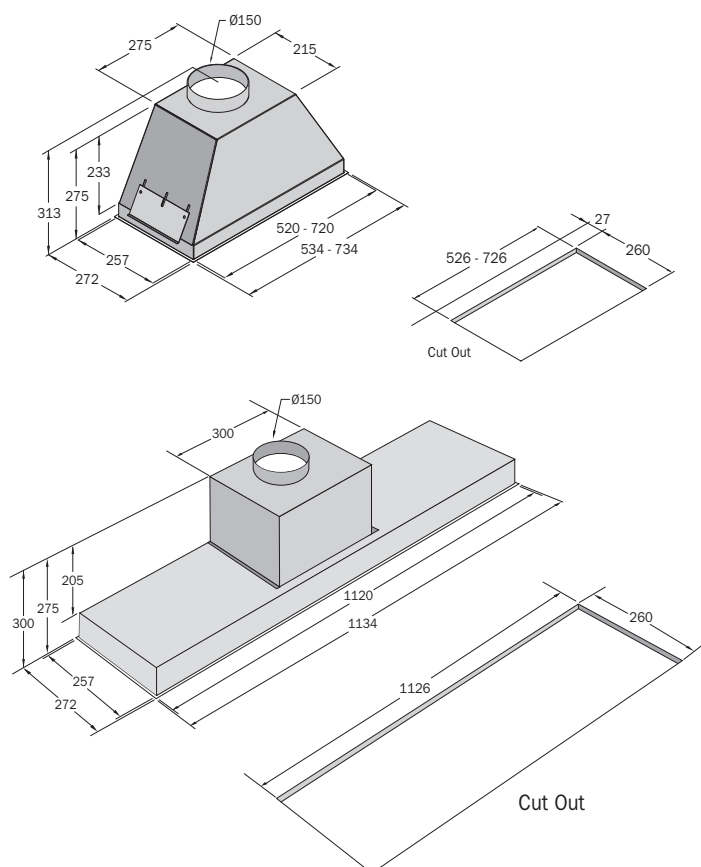SPECIFICATIONS

Controls: Soft Touch Control
Width: 600mm, 900mm or 1200mm
Colour/finish: Stainless Steel
Lighting: LED - 4000k

Options available:
Warm White 2700k and
Cool White 5500k - 2.4w/3.6w
See page 64 for prices

Distance from Hob: Should be 650mm
Motor included in price

Motor	H800		
Model	600mm	900mm	1200mm
Airflow m ³ /h	247 - 592	247 - 592	247 - 592
Pressure Pa	566	566	566
Noise db	47-67	47-67	47-67
Power W	235	235	235
Outlet Width mm	150	150	150
Fuse Rating	3A	3A	3A
Energy Class	B	B	B

Rigoletto Built-In Cupboard Hood
Stainless Steel

534mm wide **£585** (Cabinet size 600mm)

734mm wide **£615** (Cabinet size 900mm)

1134mm wide **£735** (Cabinet size 1200mm)

Optional Remote Control £104
Optional Charcoal Filters

600mm - PCR5 **£12** each

900mm - PCR2 **£14** each


1200mm - PCR2 **£14** each

All Prices Exclusive of VAT

HIDEAWAY BUILT-IN CUPBOARD HOOD



SPECIFICATIONS

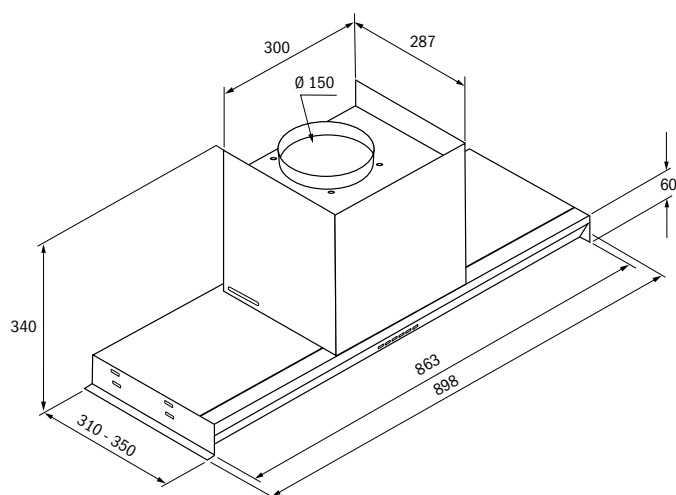

Controls: Soft Touch

Width: 900mm

Colour/finish: Stainless Steel

Lighting: LED

	Motor included in price
Motor	H800
Airflow m ³ /h	592
Pressure Pa	568
Noise db	47-60
Power W	235
Fuse Rating	3A
Energy Class	B

Hideaway Built-In Cupboard Hood

Stainless Steel

900mm wide **£629**


Optional Remote Control **£104**

Optional Charcoal Filter

FCCN **£16** each

All Prices Exclusive of VAT

BOHEME WALL HOOD - BLACK GLASS

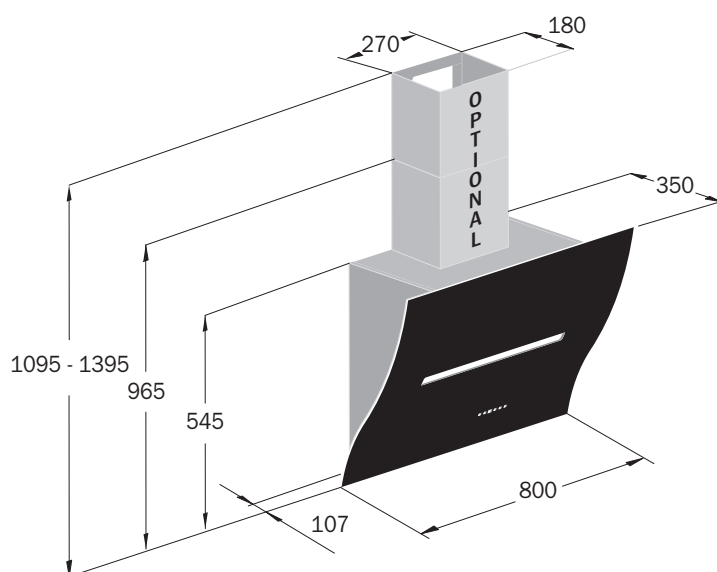SPECIFICATIONS

Controls: 4 Speed Touch Control
Width: 800mm
Colour/finish: Black Glass
Lighting: LED - 4000k

Options available:
Warm White 2700k and
Cool White 5500k - 2.4w
See page 64 for prices

Distance from Hob: Should be between 550mm - 600mm

	Motor included in price
Motor	H800
Airflow m ³ /h	345 - 770
Pressure Pa	579
Noise db	48-68
Power W	235
Outlet Width mm	150
Fuse Rating	3A
Energy Class	A

Available with back outlet.

Boheme Wall Hood
Black Glass

800mm wide **£1048**
Optional Charcoal Filter

PCR4 **£13** each

Optional Chimney £72

All Prices Exclusive of VAT

BOHEME WALL HOOD

Activated carbon filters for use with recirculation version.

Front panel opens.

Chimney or back outlet.



Curved tempered glass panel gives both modern and minimal design.

Easy accessible grease filters for easy cleaning.


Double inlet both from the front panel and the bottom ensures the best efficiency.

LED lighting.

4 speed touch control with auto off. Signals when filters need cleaning.



BOHEME WALL HOOD - STAINLESS STEEL

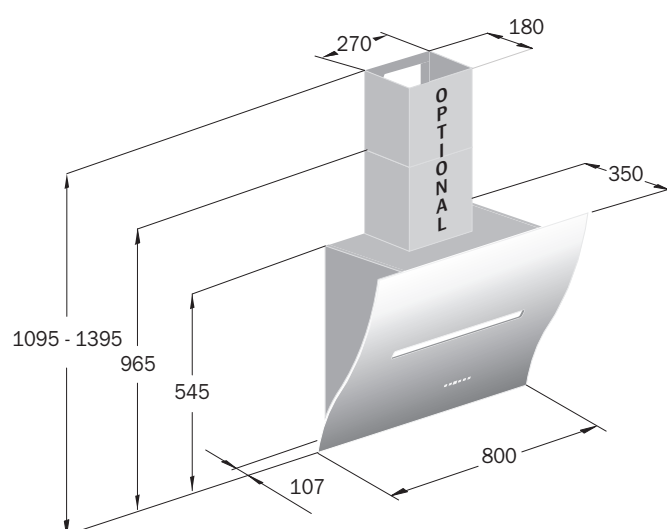SPECIFICATIONS

Controls: 4 Speed Touch Control
Width: 800mm
Colour/finish: Stainless Steel
Lighting: LED - 4000k

Options available:
Warm White 2700k and
Cool White 5500k - 2.4w
See page 64 for prices

Distance from Hob: Should be between 550mm - 600mm

	Motor included in price
Motor	H800
Airflow m³/h	345 - 770
Pressure Pa	579
Noise db	48-68
Power W	235
Outlet Width mm	150
Fuse Rating	3A
Energy Class	A

Available with back outlet.

Bohème Wall Hood
Stainless Steel

800mm wide **£847**
Optional Charcoal Filter

PCR4 **£13** each


Optional Chimney £72

All Prices Exclusive of VAT

MURANO-EVO WALL HOOD



SPECIFICATIONS

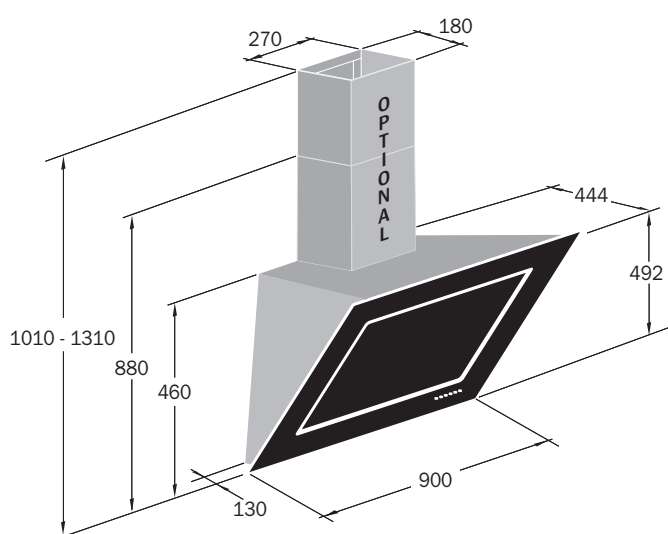

Controls: 4 Speed Touch Control

Width: 900mm

Colour/finish: Black Glass

Lighting: LED - 4000k

Options available:
Warm White 2700k and
Cool White 5500k - 3.6w
See page 64 for prices

Distance from Hob: Should be 550mm

	Motor included in price
Motor	H850
Airflow m ³ /h	338 - 825
Pressure Pa	584
Noise db	51-69
Power W	235
Outlet Width mm	150
Fuse Rating	3A
Energy Class	A

Available with back outlet.

Murano-Evo Wall Hood

Black Glass

900mm wide **£913**


Optional Chimney £72

All Prices Exclusive of VAT

LEONARDO WALL HOOD



SPECIFICATIONS

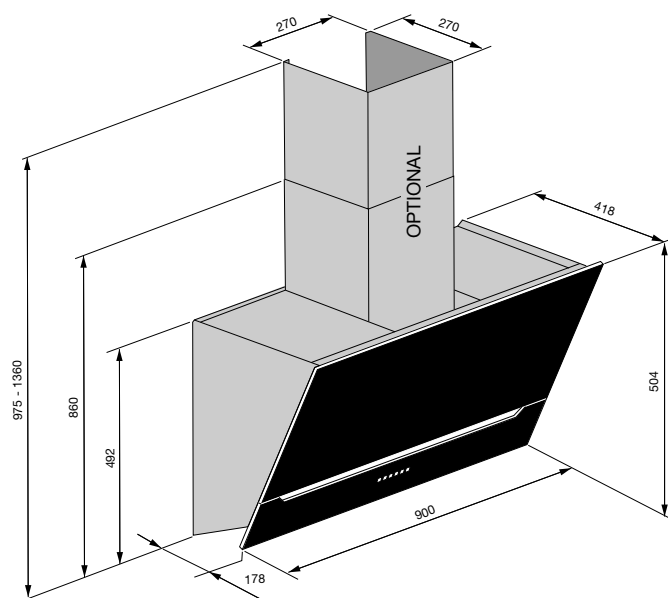

Controls: Touch Controls

Width: 900mm

Colour/finish: Black Glass

Lighting: LED 7w - 3200k

Distance from Hob: Should be between 550mm - 600mm

	Motor included in price
Motor	H850
Airflow m ³ /h	760
Pressure Pa	579
Noise db	48-68
Power W	280
Outlet Width mm	150
Fuse Rating	3A
Energy Class	A

Available with back outlet.

Leonardo Wall Hood

Black Glass

900mm wide **£1138**


Optional Chimney **£89**

Re-circulation Filter

KFCPT **£133**

All Prices Exclusive of VAT

LEONARDO WALL HOOD

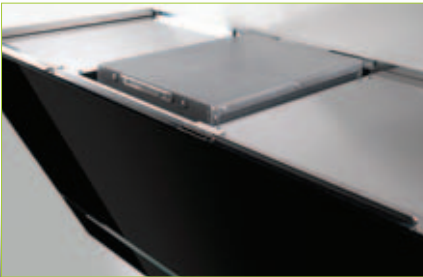

High efficiency and quality active carbon cartridge. 3 years without maintenance.

Patented space saving function and design. Internal compartments for extra storage space.



LED lights backlighting glass shelves.

LED lighting 3200k.

Access to grease filters.



HAMLET WALL HOOD - STAINLESS STEEL



SPECIFICATIONS

Controls: 4 Speed Touch Control


Width: 600 or 800mm

Colour/finish: Stainless Steel

Lighting: LED - 4000k

Options available:
Warm White 2700k and
Cool White 5500k - 2.4w
See page 64 for prices

Distance from Hob: Should be between 550mm - 600mm

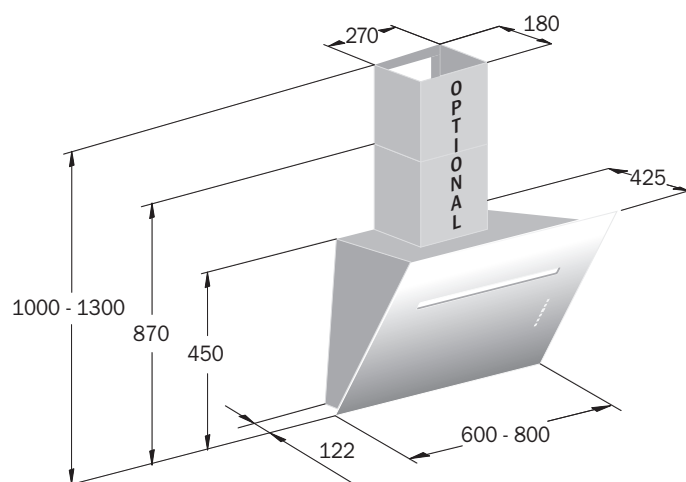

Motor included in price

Motor	H800	
Model	600mm	800mm
Airflow m³/h	325-760	345-770
Pressure Pa	563	579
Noise db	54-70	48-68
Power W	235	235
Outlet Width mm	150	150
Fuse Rating	3A	3A
Energy Class	B	A

Available with back outlet.

Hamlet Wall Hood

Stainless Steel

600mm wide **£722**

800mm wide **£761**


Optional Charcoal Filters

600mm - PCR5 **£12** each

800mm - PCR3 **£13** each

Optional Chimney £72

All Prices Exclusive of VAT

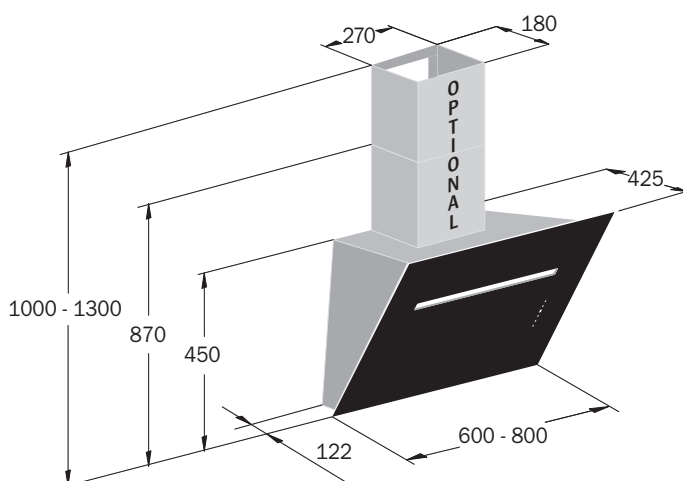HAMLET WALL HOOD - BLACK GLASS**SPECIFICATIONS****Controls: 4 Speed Touch Control****Width: 600 or 800mm****Colour/finish: Black Glass****Lighting: LED - 4000k**

Options available:
Warm White 2700k and
Cool White 5500k - 2.4w
See page 64 for prices

Distance from Hob: Should be between 550mm - 600mm**Motor included in price**


Motor	H800	
	600mm	800mm
Model	325-760	345-770
Airflow m³/h	563	579
Pressure Pa	54-70	48-68
Noise db	235	235
Power W	150	150
Outlet Width mm	3A	3A
Fuse Rating	B	A
Energy Class		

Available with back outlet.

Hamlet Wall Hood**Black Glass**600mm wide **£783**800mm wide **£868****Optional Charcoal Filters**600mm - PCR5 **£12** each800mm - PCR3 **£13** each**Optional Chimney £72**

All Prices Exclusive of VAT

VIVALDI WALL HOOD

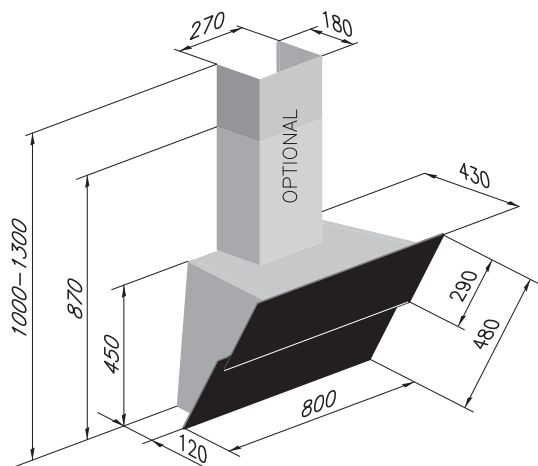SPECIFICATIONS

Controls: 4 Speed Touch Control
Width: 800mm
Colour/finish: Black Glass/White Glass
Lighting: LED - 4000k

Options available:
Warm White 2700k and
Cool White 5500k - 3.6w
See page 64 for prices

Distance from Hob: Should be between 550mm - 600mm

	Motor included in price
Motor	H800
Airflow m ³ /h	330-757
Pressure Pa	579
Noise db	50-68
Power W	235
Outlet Width mm	150
Fuse Rating	3A
Energy Class	A

Available with back outlet.

Vivaldi Wall Hood
Black Glass

800mm wide **£717**
White Glass

800mm wide **£755** (to special order)

Optional Charcoal Filter

FCCN **£18** each


Optional Chimney £72

All Prices Exclusive of VAT

VERDI ISLAND HOOD



SPECIFICATIONS

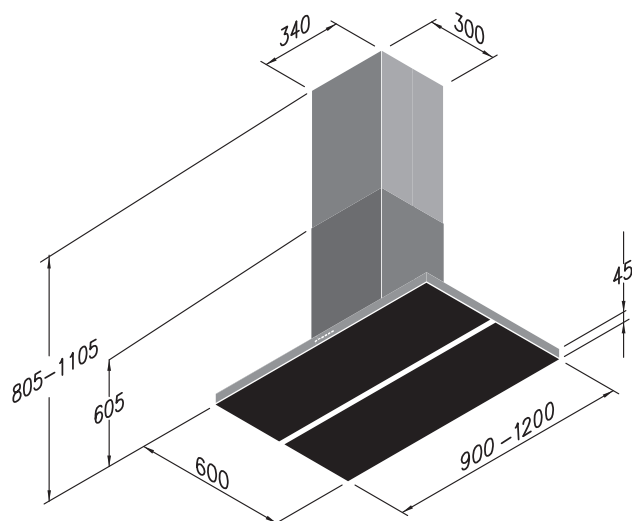

Controls: Soft Touch

Width: 900mm or 1200mm

Colour/finish: Anthracite/Black Glass

Lighting: LED - 17w - 4200k

Distance from Hob: Should be 650mm

	Motor included in price
Motor	S820
Airflow m ³ /h	280-765
Pressure Pa	563
Noise db	47-69
Power W	230
Outlet Width mm	150
Fuse Rating	3A
Energy Class	A

Verdi Island Hood

Anthracite/Black Glass

900mm wide **£1152**


1200mm wide **£1350**

Optional Charcoal Filter

PCR4 **£13** each

All Prices Exclusive of VAT

MEDEA ISLAND HOOD

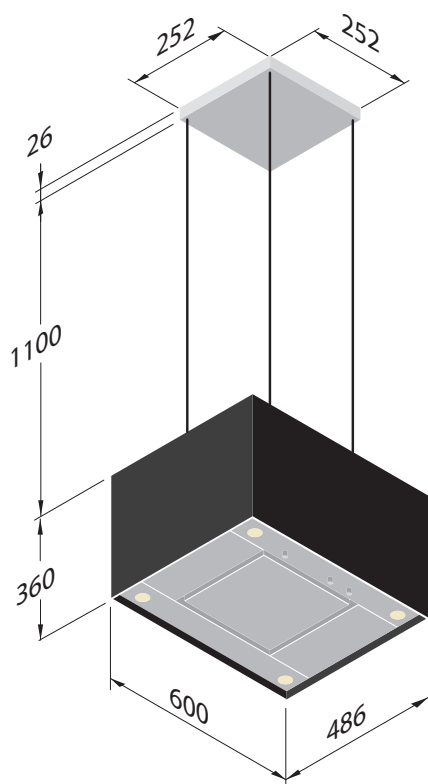SPECIFICATIONS

Controls: 4 Speed Rotary Control
Width: 600mm
Colour/finish: Black Glass/White Glass
Lighting: LED - 4000k

Options available:
Warm White 2700k and
Cool White 5500k - 4.8w
See page 64 for prices

Distance from Hob: Should be 650mm

	Motor included in price
Motor	H700
Airflow m³/h	265-630
Pressure Pa	560
Noise db	49-68
Power W	230
Outlet Width mm	150
Fuse Rating	3A
Energy Class	B

Medea Island Hood
Black Glass

600mm wide **£886**
White Glass

600mm wide **£920** (to special order)

Optional Charcoal Filter


PCR3 **£13** each

All Prices Exclusive of VAT


NABUCCO ISLAND HOOD



SPECIFICATIONS

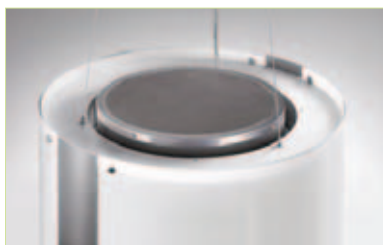

KFCPN filter kit (optional)

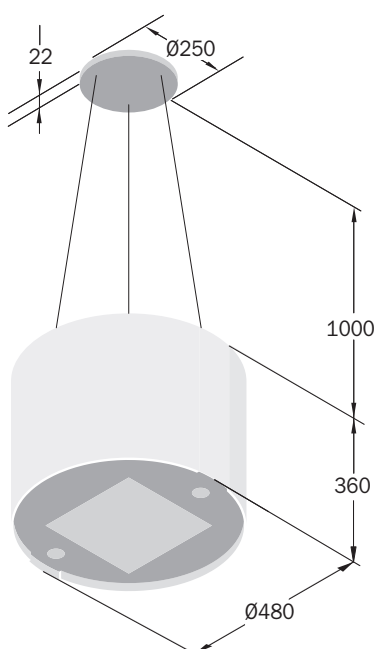

Recirculating Model

Controls: 4 Speed Rotary Control

Width: 480mm

Colour/finish: Extra White Glass

Lighting: LED - 4.8w - 4000k and
LED Strip - 6/9w - 3500k

Distance from Hob: Should be 650mm

	Motor included in price
Motor	H700
Airflow m³/h	220-600
Pressure Pa	560
Noise db	50-68
Power W	230
Outlet Width mm	150
Fuse Rating	3A
Energy Class	B

Nabucco Island Hood

Extra White Glass


480mm wide **£1164**

Filters

FCCN Standard Filter **£16**KFCPN Filter Cartridge **£149** (optional)
(Life is 3 years)

All Prices Exclusive of VAT

TURANDOT ISLAND HOOD

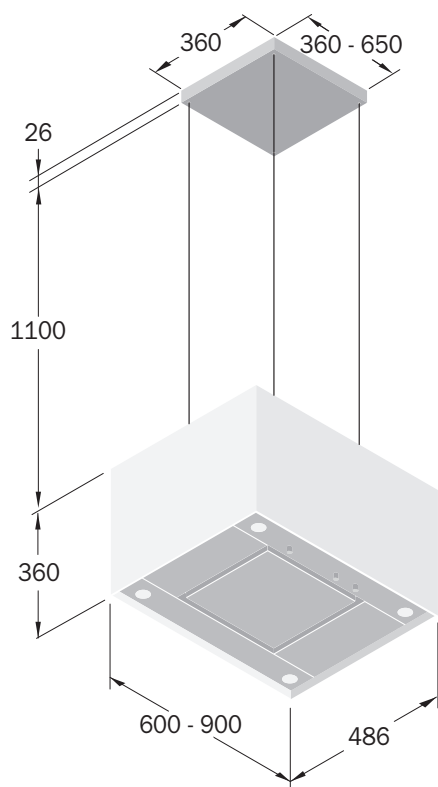SPECIFICATIONS

Recirculating Model
Controls: 4 Speed Rotary Control

Width: 600mm or 900mm

Colour/finish: Extra White Glass

Lighting: LED - 4.8w - 4000k and
LED Strip - 6/9w - 3500k

Distance from Hob: Should be 650mm

Motor included in price

Motor	H700	
Model	600mm	900mm
Airflow m ³ /h	220-600	230-650
Pressure Pa	560	560
Noise db	50-68	50-68
Power W	230	235
Fuse Rating	3A	3A
Energy Class	B	B

Turandot Island Hood
Extra White Glass

600mm wide **£1138**

900mm wide **£1321**
Filters

FCCN Standard Filter **£16**

Filter Cartridge **£133**


(Life is 3 years)

All Prices Exclusive of VAT

TURANDOT ISLAND HOOD

Filter kit

Charcoal filter is made from 3kg high quality granular activated charcoal which will last 3 years without maintenance.



KFCPT

Optional



Power cable with transparent coating.

White tempered glass provides ambient lighting.

Coated steel adjustable support wires.

Dimmable low power strip with LEDs (3500k) provides ambient light.

Perimeter extraction.


High efficiency LED spotlights (4000k).

4 speed rotary control.

ROSSINI ISLAND HOOD



SPECIFICATIONS

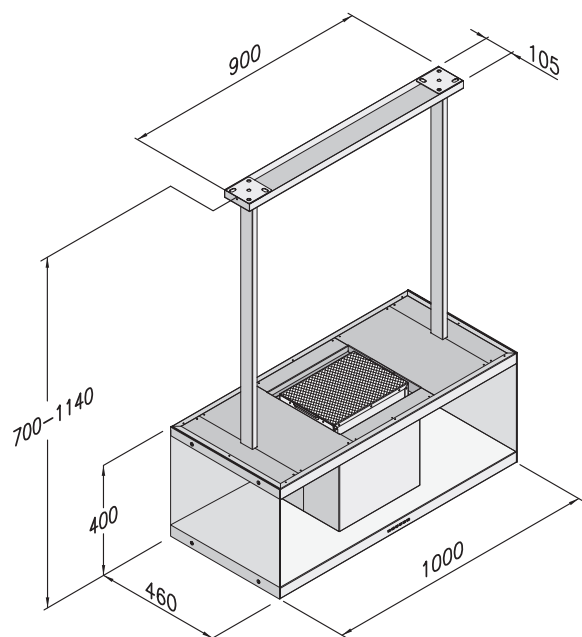

Recirculating Model

Controls: Soft Touch

Width: 1000mm

Colour/finish: Stainless Steel/Glass

Lighting: LED - 6 x 1.2w - 4000k

Distance from Hob: Should be 650mm

	Motor included in price
Motor	S800
Airflow m ³ /h	247-815
Pressure Pa	580
Noise db	45-71
Power W	230
Fuse Rating	3A
Energy Class	A

Rossini Island Hood

Stainless Steel/Glass including

Recirculation Filter KFCPT (Lasts 3 years)

1000mm wide **£1548**

All Prices Exclusive of VAT

ROSSINI ISLAND HOOD



High efficiency and quality active carbon cartridge.
3 years without maintenance.

High stability design fixing
system.



Dark grey tempered side
glass panels.


LED lighting.

Soft touch controls with speed indicator
and automatic switch-off.

Additional storage space
with LED lighting.



CORIAN® WING ISLAND HOOD

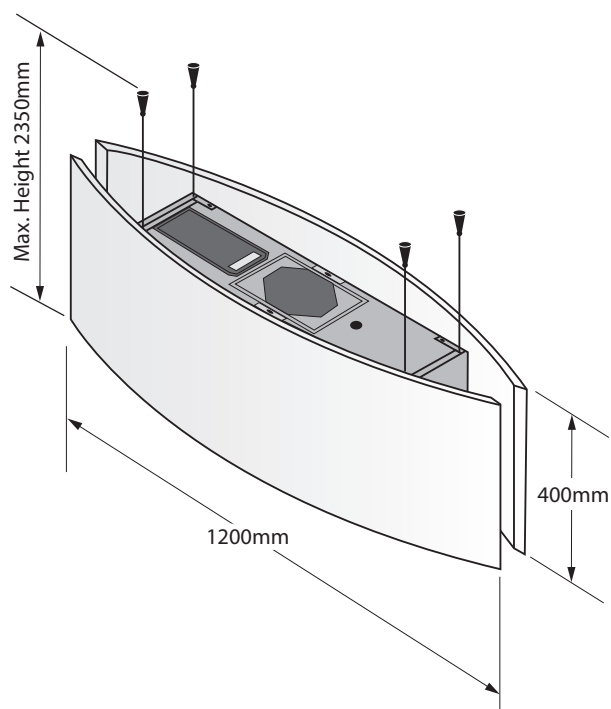SPECIFICATIONS


Controls: 4 Speed Touch Control and Remote Control

Width: 1200mm

Colour/finish: Corian®

Lighting: LED

Distance from Hob: Should be 650mm

	Motor included in price
Motor	H850
Airflow m³/h	600
Pressure Pa	172
Noise db	67
Power W	57.8
Outlet Width mm	150
Fuse Rating	3A
Energy Class	B

Available in all 61 kitchen colours of Corian®

Corian® Wing Island Hood

White Corian®
1200mm wide **£1362**

All Prices Exclusive of VAT


MOTORS AND ACCESSORIES

Remote Motor AMR09

Colour/Finish: Stainless Steel
Free airflow: 800-820m³/h
Pressure: 560Pa
Noise: 51-72db
Power: 235W
Air outlet: 150mm

£299

10 metre cable

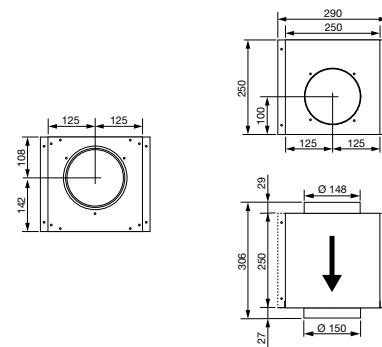


Remote Motor AMR10

Colour/Finish: Stainless Steel
Free airflow: 910-930m³/h
Pressure: 580Pa
Noise: 40-73db
Power: 345W
Air outlet: 150mm

£470

10 metre cable

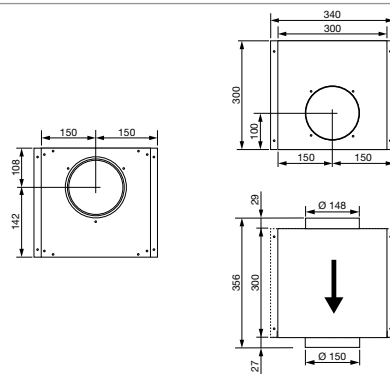


Remote Motor AMR20

Colour/Finish: Stainless Steel
Free airflow: 1780-1800m³/h
Pressure: 590Pa
Noise: 48-75db
Power: 690W
Air outlet: 200mm

£793

10 metre cable


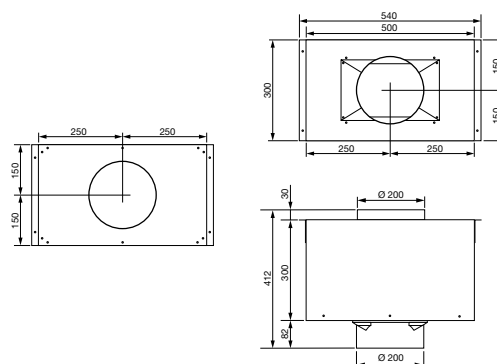


Flat Motor AMF10

Colour/Finish: Stainless Steel
Free airflow: 1000m³/h
Pressure: 600Pa
Noise: 56-78db
Power: 145W
Air outlet: 150mm

£473

10 metre cable

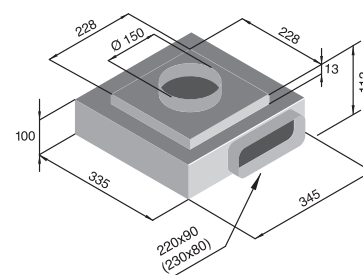
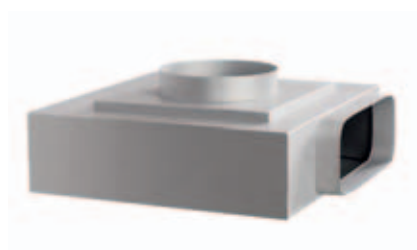


Flat Motor AMF13

Colour/Finish: Stainless Steel
Free airflow: 1300m³/h
Pressure: 760Pa
Noise: 64-80db
Power: 190W
Air outlet: 150mm

£507

10 metre cable

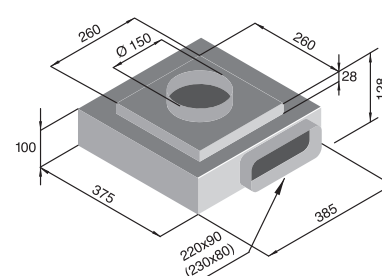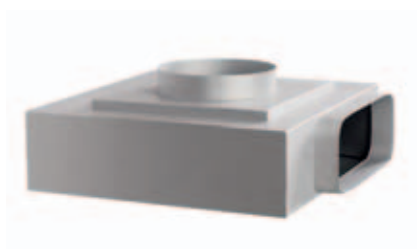

All Prices Exclusive of VAT

MOTORS AND ACCESSORIES

External Motor AME12

Colour/Finish: Stainless Steel

Free airflow: 1200m³/h

Pressure: 760Pa




Noise: 65-85db

Power: 190W

Air outlet: 150mm

£808

10 metre cable





External Motor Roof Kit

Colour/Finish: Stainless Steel

To be used with AME12 Motor

£305

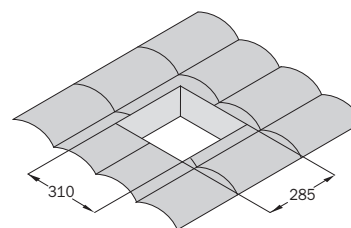


Recirculating Kit

Alternative Recirculation

KAFZ

£23

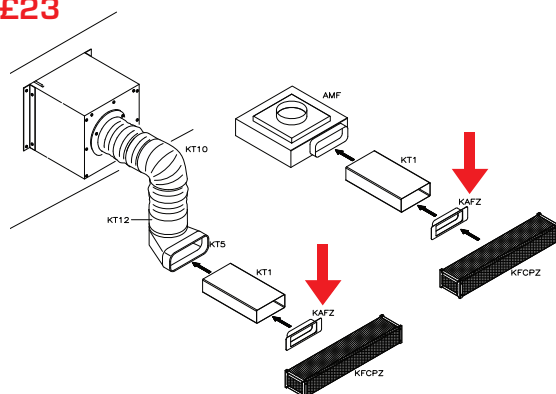


Plinth Charcoal Filter Kit

Optional Charcoal Filter Kit

KFCPZ

£178

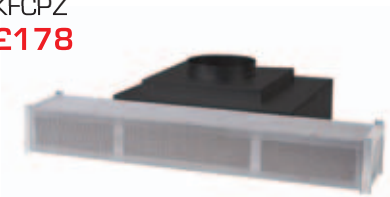


Silent Kit

Silent Kit

KSIL

£115



KPL Kit

KPL Kit

Optional kit to cover unfinished worktop edge.

The top of any Parsifal can be customised to suit your worktop.

900mm **£160** 1200mm **£190**



Charcoal Filters

Rectangular Round

£14

£16

PCR1 Carbon Filters **£12**

PCR4 Carbon Filters **£13**

PCR2 Carbon Filters **£14**

PCR5 Carbon Filters **£12**

PCR3 Carbon Filters **£12**




Optional White LED's for Airuno Cooker Hoods

Warm White LED's 2700k **£22** each

Cool White LED's 5500k **£22** each

All Prices Exclusive of VAT

THE **COMPAIR**® EXTRACTION SYSTEM FOR USE WITH COOKER HOODS

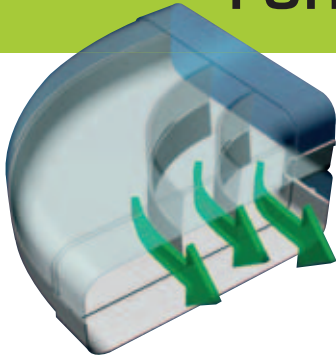

Example of bends

The patented system comprises guide vanes integrated into the bends which reduces the turbulence of air that builds up in the bend.

The power of extraction is maintained thus adding to the effectiveness of the cooker hood.


The noise level is reduced... there is a saving in energy.



Deflector



Horizontal bend

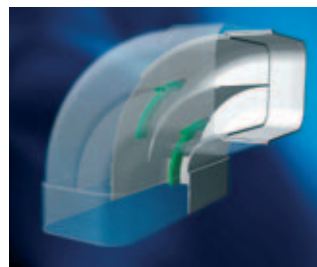

Vertical bend






Round tube bend

The integrated guide vane technology stabilises the airflow in the duct and guides it outside without any loss of pressure.

The **COMPAIR**® Automatic Wall Vent

- No external power is required.
- The wall vent operates by the airflow when the cooker hood is operating.
- The closing of the wall vent is by spring and magnets spring loaded for tight seal which stops cold air coming into the kitchen.
- Good seal when hood is switched off.
- Opens and closes automatically.
- An all round seal prevents heat loss thus saving heat energy.

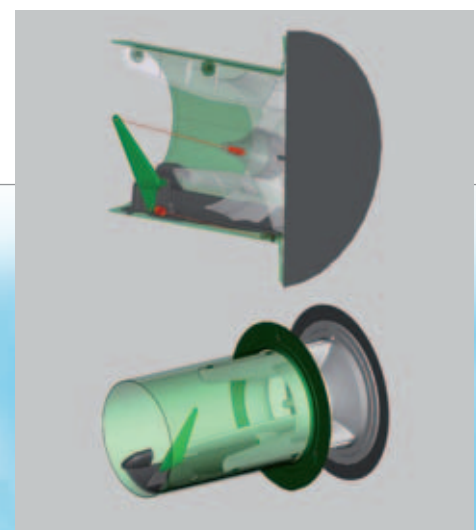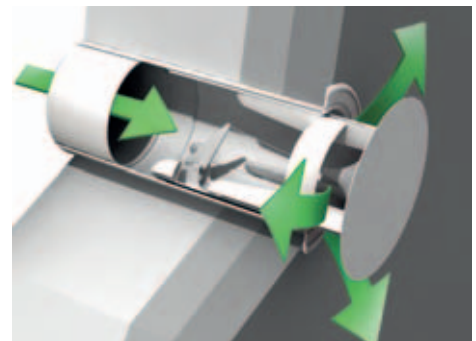

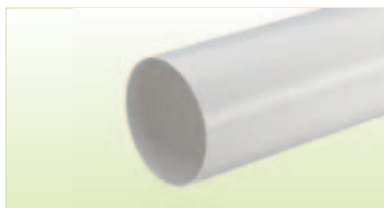COMPAIR® 150mm ROUND DUCTING

R-1000 150 round pipe

White, 1000mm **£18.25**

Ref Code: 4052102


R-VBS 150 round pipe connector

White, 60mm **£5.00**

Ref Code: 4052017


R-RVB flow 150 90° pipe bend

White **£19.87**

Ref Code: 4052015



**K-JAL 150 external wall vent
190 x 190 back pressure shutter**

White **£13.50**

Ref Code: 4044044

Brown **£13.50**

Ref Code: 4044045

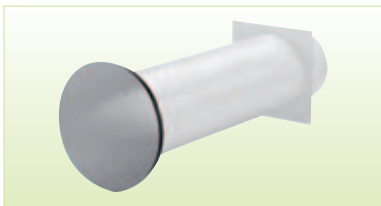
150 R automatic wall vent


White/Stainless Steel **£252.00**

Ref Code: 4043040


E-Jal 150 external wall vent


Stainless Steel **£102.00**

Ref Code: 4022012

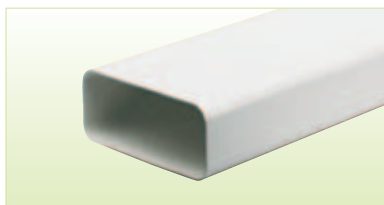COMPAIR® 220mm x 90mm RECTANGULAR DUCTING

F-VRO 150 flat duct


White, 1000mm **£22.45**

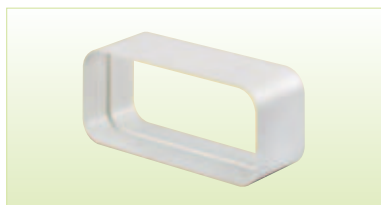Ref Code: 4043001


F-RVB pipe connector


White, 80mm **£8.62**

Ref Code: 4043005

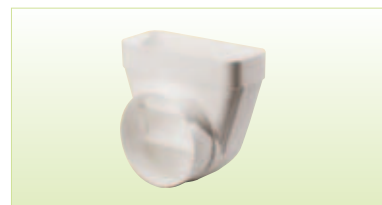
F-UR 150 90° deflector


White **£23.37**

Ref Code: 4043002

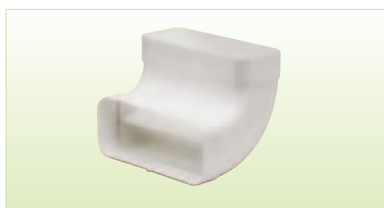
F-RBV 150 90° vertical pipe bend

White **£18.62**

Ref Code: 4043004

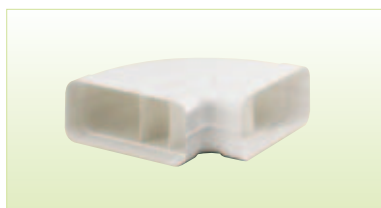
F-RBH 150 90° horizontal pipe bend


White **£25.50**

Ref Code: 4043003


F-EST end connector

White **£19.50**

Ref Code: 4043006

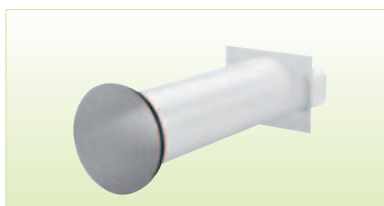
150 automatic wall vent

White/Stainless Steel **£252.00**

Ref Code: 4043041


All Prices Exclusive of VAT

DUCTING




Ducting Clips

922 **£1.60**

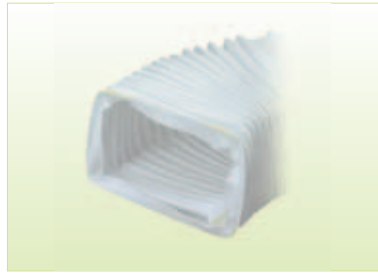


Flexible Hose 0.5m

9305 **£8.60**

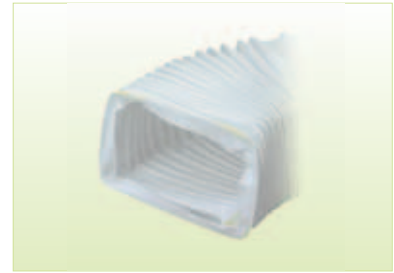


Flexible Hose 3.0m

933 **£27.70**

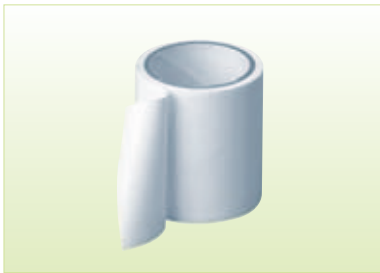

Ducting Sealing Tape 4.6m

123-4-4.6m **£2.62**

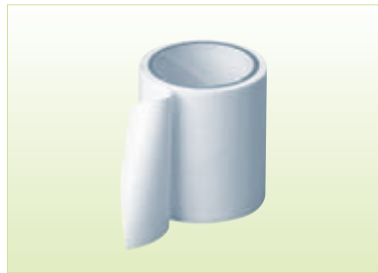

Ducting Sealing Tape 33m

123-33m **£9.15**



Round Ducting Clip

696 **£2.20**



Round Flexible 1m

661 **£3.92** per metre



Round Flexible 3m

663 **£10.45** per 3 metre



Round Flexible 6m

666 **£20.50** per 6 metre



Airbrick Outlet Cover

905W White **£11.99**

905B Brown **£11.99**

905C Cotswold **£11.99**

905T Terracotta **£11.99**



Airbrick Outlet Adaptor

977 **£7.40**



Aluminium Flexi Duct

603215 **£14.07** per 1.5 metre

603215 **£23** per 3.0 metre

Aluminium Duct Clip

127-6 **£2.45**

We have our own engineer who is available to help you at all times
For service calls contact Jonathan Gledhill on 0113 201 2240

AIRUNO

Wakefield House, Gildersome Spur, Morley, Leeds LS27 7JZ.

t: 0113 201 2240 **f:** 0113 253 0717 **e:** info@airuno.co.uk **w:** www.airuno.co.uk

CD (UK) LTD t/a Air Uno

1.9.17



Follow us on twitter at
https://twitter.com/AirUno_UK